

Innovative Sensor Solutions

Product overview



Partnership.

Precise.

Pioneering.

Visibly better: Baumer sensors.

The Baumer Group is leading at international level in the development and production of sensors, shaft encoders, measuring instruments as well as components for automatic image processing. As an owner-managed family business, we employ about 2700 workers worldwide in 38 subsidiaries and 19 countries. With marked customer orientation, consistently high quality and vast innovation capability, Baumer develops specific solutions for many industries and applications worldwide.

Our standards – your benefits.

- Passion coupled with expertise – both have made us a sensor pioneer and technology leader
- Our range of services is hard to beat – we have the right product, developed by our own team, for every task
- Inspiring through innovation – a challenge Baumer employees take on every day
- Reliability, precision and quality – our customers' requirements are what drives us
- Partnership from the start – together with our customers we develop suitable solutions
- Always a step ahead – thanks to our production depth, our flexibility and our delivery reliability
- Available worldwide – Baumer is Baumer everywhere



Object detection

Sensors, proximity switches and light barriers for object and position detection.

Inductive proximity switches

The proven solution for safe, non-contact detection of metal objects

Cylindrical housings	6
Rectangular housings	8
Application-specific inductive sensors	10



Capacitive sensors

Proximity switch for non-contact detection of liquid as well as solid objects and bulk solids

Capacitive proximity sensors in metal housings	16
Capacitive proximity sensors in plastic housings	18



Light barriers and light sensors

Unique reliable object detection and positioning with Baumer optical sensors

Subminiature and miniature sensors	20
Standard sensors – Rectangular and cylindrical	24
Sensors with extra power – O300/O500	26
Laser sensors	28
Light barriers without reflector – <i>SmartReflect</i> [®]	32
Transparent detection	36
Washdown design	40
Hygienic design	41
Fork and angle sensors	42
Differential, contrast and color sensors	44



Fiber optic sensors and fiber optic cables

Always close to the action – detecting tiny objects in cramped or inaccessible places

Plastic fiber optic sensors and fiber optic cables	46
Glass fiber optic sensors and fiber optic cables	48



Ultrasonic sensors – the most versatile object detection

Undisturbed by difficult environmental conditions and varying object properties

Miniaturized ultrasonic sensors	50
Robust ultrasonic sensors with flexible parameterization	51
Ultrasonic sensors with Teach button	52
High-speed sensors /	
Chemically robust sensors	54
Sensors with sonic nozzles / Large sensing distances	55



Magnetic and cylinder sensors

Long-distance detection of magnetic fields

Magnetic proximity sensors	56
Cylinder sensors	57
Hall sensors	58
Magnetic angle sensors	59



Edge measurement and detection

Number 1 in flawless edge detection

Edge measurement	60
Copy counters SCATEC®	62



Precision mechanical switches *My-Com®*

Micrometer precision – 70 times more accurate than a hair is thick

Cylindrical and rectangular housings	64
--------------------------------------	----



Distance measurement

Sensors for detecting distances and distance information from the μm range to over 40 m.

Optical distance sensors

Precise distance, spacing and position measurements even on challenging surfaces

Minature sensors	68
High performance sensors	69
Sensors for long measuring range and standard distance sensors	70
Sensors in hygienic and washdown design	72
Radar sensors	74



Ultrasonic distance sensors

Accurate distance measurement regardless of material, surface, color or transparency

Minature sensors	76
Robust ultrasonic sensors with flexible parameterization	77
Ultrasonic sensor with teach button	78
Chemically robust sensors / for off-highway machinery	80
With sonic nozzles / long ranges	81



Inductive distance sensors – AlphaProx®

Measure distances on metal objects accurate to a micrometer

Cylindrical housings	82
Rectangular housings	84
Linearized characteristic curve	86
Factor 1 – same measuring range for all metals	87
High-precision and high-sensitivity sensors	88
Robust sensors / Designed for Reliability	89
Sensors with IO-Link interface	90



Linear magnetic encoders

Non-contact length measuring operations, cost-efficient and precise.

Linear magnetic encoders	92
--------------------------	----



Measuring wheel encoders

The efficient and reliable solution to measure length

Measuring wheels	94
Inkremental encoder	95
Handheld programming tool	95



Cable transducers

Linear travel measurement made easy. Easy installation, reliable results

Cable transducer	96
------------------	----



Accessories

An easy and quick way to optimal functionality

Cables & adapters, mounting accessories	98
Testing and parameterization, network components	99
Reflectors & beam columnators	100
Magnets	101



Inductive proximity switches

Cylindrical inductive proximity switches for factory automation

The proven solution for safe, non-contact detection of metal objects

- Very small sensors with all integrated evaluation electronics and large sensing distance
- Sturdy, maintenance-free and durable
- Always the right sensor thanks to a wide variety of variants
- Millions of them in use - highest precision and guaranteed reliability thanks to over 40 years of experience



	IFRM 03 external electronics	IFRM 03	IFRM 04 Thread	IFRM 04	IFRM 05
category	Subminiatur	Subminiatur	Subminiatur	Subminiatur	Subminiatur
dimensions	ø 3 mm	ø 3 mm	M4	ø 4 mm	M5
housing length	12 mm	from 12 mm	from 22 mm	from 15 mm	from 15 mm
nominal sensing distance S_n	0,8 mm	0,8 ... 1 mm	0,8 mm	1 ... 1,6 mm	1 ... 1,6 mm
switching frequency	3 kHz	to 4 kHz	3 kHz	to 5 kHz	to 5 kHz
output signal	PNP NPN	PNP NPN	PNP NPN	PNP NPN	PNP NPN
connection types	flylead connector M8 (electronics in connector)	cable 2 m flylead connector M8 wires	cable 2 m flylead connector M8	connector M5 connector M8 cable 2 m flylead connector M8 wires	connector M5 connector M8 cable 2 m flylead connector M8 wires
housing material	stainless steel	stainless steel	stainless steel	stainless steel	stainless steel
operating temperature	-25 ... +75 °C	-25 ... +75 °C -10 ... +70 °C	-25 ... +75 °C	-25 ... +75 °C	-25 ... +75 °C
protection class	IP 67	IP 67	IP 67	IP 67	IP 67
specific features					

Cylindrical inductive proximity switches for factory automation

Learn more:
www.baumer.com/inductive



IFRM 06 IR06.PxxS	IFRM 08 IR08.PxxS	IFRM 12 IR12.PxxS	IFRM 18 IR18.PxxS	IFRM 30 IR30.PxxS
Sub-/Miniatur	Sub-/Miniatur	Compact	Compact	Compact
ø 6,5 mm	M8	M12	M18	M30
from 22 mm	from 18 mm	from 30 mm	from 35 mm	from 35 mm
2 ... 6 mm	2 ... 6 mm	4 ... 10 mm	8 ... 15 mm	10 ... 24 mm
to 5 kHz	to 5 kHz	to 2 kHz	to 500 Hz	to 500 Hz
PNP NPN	PNP NPN	PNP NPN	PNP NPN	PNP NPN
connector M8 cable 2 m flylead connector M8	connector M8 connector M12 cable 2 m flylead connector M8	connector M8 connector M12 cable 2 m	connector M8 connector M12 cable 2 m	connector M12 cable 2 m
stainless steel	stainless steel	brass nickel plated	brass nickel plated	brass nickel plated
-25 ... +75 °C	-25 ... +75 °C	-25 ... +75 °C	-25 ... +75 °C 0 ... +65 °C	-25 ... +75 °C
IP 67	IP 67	IP 67	IP 67	IP 67

■ variants with antivalent output (NO & NC)

■ variants with antivalent output (NO & NC)

■ variants with antivalent output (NO & NC)

Inductive proximity switches

Rectangular inductive proximity switches for factory automation

The proven solution for safe, non-contact detection of metal objects

- Very small sensors with all integrated evaluation electronics and large sensing distance
- Sturdy, maintenance-free and durable
- Millions of them in use - highest precision and guaranteed reliability thanks to over 40 years of experience



	IFFM 08	IFFM 04	IFFM 06	IFFM 08
category	Subminiatur	Subminiatur	Miniatur	Miniatur
dimensions (B × T × L)	8 × 4,7 × 16 mm	4 × 4 × 22 mm	6 × 6 × 20 ... 30 mm	8 × 8 × 20 ... 60 mm
nominal sensing distance S_n	2 mm	0,8 mm	1 mm	2 mm
switching frequency	5 kHz	3 kHz	5 kHz	5 kHz
output signal	PNP NPN	PNP NPN	PNP NPN	PNP NPN
connection types	cable 2 m flylead connector M8	cable 2 m	connector M5 cable 2 m	connector M8 cable 2 m flylead connector M8
housing material	die-cast zinc nickel plated	stainless steel	brass nickel plated	brass nickel plated die-cast zinc nickel plated
operating temperature	-25 ... +75 °C	-25 ... +75 °C	-25 ... +75 °C	-25 ... +75 °C
protection class	IP 67	IP 67	IP 67	IP 67
specific features	■ extra flat design (4.7 mm)			

Rectangular inductive proximity switches for factory automation

Learn more:
www.baumer.com/inductive



IFFM 12

IFFM 20

Compact

Compact

12 × 8 × 28 mm

20 × 10 × 41 mm

4 mm

5 ... 8 mm

2 kHz

to 1 kHz

PNP
NPN

PNP
NPN

connector M5

connector M8

brass nickel plated

brass nickel plated

-25 ... +75 °C

-25 ... +75 °C


IP 67

IP 67

Inductive proximity switches

Application-specific inductive sensors – Outdoor / high temperature

- Rugged Outdoor and Washdown sensors
- High shock and vibration resistance
- Sensors with extended temperature range up to 180 °C



Outdoor / Washdown	IFRM 12 / 18 Outdoor	IFRR 08 / 12 / 18 Washdown
features	<ul style="list-style-type: none"> ■ Rugged stainless steel (V4A) or all-metal housing ■ IP 69K long-term seal – <i>proTect+</i> ■ High signal quality in an extended temperature range 	
dimensions	M12 / M18	M8 / M12 / M18
nominal sensing distance S_n	6 ... 12 mm	3 ... 12 mm
switching frequency	0,4 ... 2 kHz	0,5 ... 3 kHz
housing material	brass nickel plated	stainless steel 1.4404 (V4A)
operating temperature	-40 ... +80 °C	-40 ... +80 °C
protection class	IP 67	IP 68/69K & <i>proTect+</i>
specific features		<ul style="list-style-type: none"> ■ Ecolab-tested ■ FDA-compliant ■ Vibration resistance EN 61373: 2010 (category 3) ■ Shock resistance EN 61373: 2010 (category 3)



High temperature up to +180 °C	IFRM 06 / 08 / 12 High temperature up to +100 °C	IFRD 06 / 08 / 12 / 18 High temperature up to +100 °C Full metal housing (<i>DuroProx</i>)	IFRH 06 / 08 / 12 High temperature up to +180 °C with separated electronics
features	<ul style="list-style-type: none"> ■ Sensors with extended temperature range up to 180 °C ■ Versions with integrated and separate evaluation electronics ■ High switching frequencies 		
dimensions	∅ 6,5 mm / M8 / M12	∅ 6,5 mm / M8 / M12 / M18	M8 / M12 / M18
nominal sensing distance S_n	2 ... 4 mm	2 ... 6 mm	1,5 ... 5 mm
switching frequency	2 ... 5 KHz	100 ... 150 Hz	1 ... 4 kHz
housing material	stainless steel brass nickel plated	stainless steel 1.4404 (V4A)	stainless steel brass nickel plated
operating temperature	-25 ... +100 °C	-25 ... +100 °C	-25 ... +180 °C
protection class	IP 67	IP 68 / IP 69K	IP 67

Application-specific inductive sensors – High pressure / magnetic field

- Pressure resistant up to 500 bar
- Immune to welding and magnetic fields up to 90 mT



Learn more:
www.baumer.com/inductive



High pressure resistant sensors	IFRP 12	IFRP 16	IFRP 18
features	<ul style="list-style-type: none"> ■ Pressure resistant up to 500 bar ■ Sensor surface made of zirconium oxide (ZrO₂/ceramics) ■ High switching frequencies 		
dimensions	M12	M16	M18
nominal sensing distance Sn	2 mm	2 mm	2 mm
switching frequency	5 kHz	3 kHz	3 kHz
housing material	stainless steel	stainless steel	stainless steel
sensing face	ZrO ₂ / ceramic	ZrO ₂ / ceramic	ZrO ₂ / ceramic
operating temperature	-25 ... +80 °C	-25 ... +80 °C	-25 ... +80 °C
protection class	IP 68/67	IP 68/67	IP 68/67



Sensors immune to welding and magnetic fields	IFRW 12	IFRW 18
features	<ul style="list-style-type: none"> ■ For magnetic fields up to 90 mT ■ PTFE-coated front ■ Chrome-plated brass housing ■ Resistant to welding sparks 	
dimensions	M12	M18
nominal sensing distance Sn	2 mm	5 mm
switching frequency	1 kHz	500 Hz
housing material	brass chromium plated	brass chromium plated
sensing face	PTFE-coated	PTFE-coated
operating temperature	-25 ... +75 °C	-25 ... +75 °C
protection class	IP 67	IP 67

Inductive proximity switches

Application-specific inductive sensors – Large sensing distance / Factor 1

- Sensors with extended switching distance up to 24 mm
- Factor 1 sensors with the same switching distance on all metals



Large sensing distance	IR06.P03S IR06.P06S	IR08.P03S IR08.P06S	IR12.P06S IR12.P10S	IR18.P12S IR18.P15S	IR30.P18S IR30.P24S
category	Miniatur	Miniatur	Compact	Compact	Compact
features	<ul style="list-style-type: none"> ■ Large installation tolerances ■ Enhanced protection against mechanical damage ■ Cylindrical designs from Ø6.5 mm to M30 ■ Flush and non-flush variants 				
dimensions	ø 6,5 mm	M8	M12	M18	M30
nominal sensing distance S_n	3 / 6 mm	3 / 6 mm	6 / 10 mm	15 / 18 mm	18 / 24 mm
switching frequency	2 kHz	2 kHz	1 kHz	400 Hz	500 Hz
housing material	stainless steel	stainless steel	brass nickel plated	brass nickel plated	brass nickel plated
operating temperature	-25 ... +75 °C	-25 ... +75 °C	-25 ... +75 °C	-25 ... +75 °C 0 ... +65 °C	-25 ... +75 °C
protection class	IP 67	IP 67	IP 67	IP 67	IP 67



Factor 1	IR06.P02F	IR08.P02F	IR12.P04F	IR18.P06F IR18.P08F
category	Miniatur	Miniatur	Compact	Compact
features	<ul style="list-style-type: none"> ■ Detection of stainless steel, aluminum and non-ferrous metals with the same sensing distance ■ High switching frequencies up to 3 kHz 			
dimensions	ø 6,5 mm	M8	M12	M18
housing length	40 / 46 mm	40 / 46 mm	40 / 50 mm	50 / 60 mm
nominal sensing distance S_n	2 mm	2 mm	4 mm	6 / 8 mm
switching frequency	3 kHz	3 kHz	2 kHz	500 Hz
housing material	stainless steel	stainless steel	brass nickel plated	brass nickel plated
operating temperature	-25 ... +75 °C	-25 ... +75 °C	-25 ... +75 °C	-25 ... +75 °C
protection class	IP 67	IP 67	IP 67	IP 67

Application-specific inductive sensors – ATEX / Hygienic

- Sensors for the Ex-area (ATEX-certified)
- Stainless steel sensors in hygienic design, EHEDG-certified



Learn more:
www.baumer.com/inductive



ATEX	IFR10.82	IFRM 06X IFRM 08X	IFRM 12	IFRM 12X IFRM 18X
category	Sub-Miniatur Circuit board mountable	Miniatur	Compact	Compact
features	<ul style="list-style-type: none"> ■ For environments with flammable gas or dust ■ ATEX certified ■ High repeat accuracy < 0.01 mm ■ Compact design 			
dimensions	10 mm	ø 6,5 mm / M8	M12	M12 / M18
nominal sensing distance Sn	2 mm	1,5 mm	4 mm	2 ... 8 mm
switching frequency	2 kHz	5 kHz	2 kHz	to 2 kHz
output circuit	NAMUR	NAMUR	PNP / NPN	NAMUR
operating temperature	-25 ... +75 °C	-20 ... +60 °C	-25 ... +65 °C	-20 ... +60 °C
protection class	IP 67	IP 67	IP 67	IP 67
approvals/certificates	ATEX 3G	ATEX 1G	ATEX 3D	ATEX 1G



Hygienic design	IFBR 06	IFBR 11	IFBR 17
category	Miniatur	Compact	Compact
features	<ul style="list-style-type: none"> ■ FDA compliant materials – EHEDG certified ■ High chemical resistance – Ecolab tested and LCP front cap ■ IP 68K long-term seal – <i>proTect+</i> ■ Flush and non-flush housings 		
dimensions	ø 6,5 mm	ø 11 mm	ø 17 mm
nominal sensing distance Sn	3 mm	4 mm (flush) 6 mm (non-flush)	8 mm (flush) 12 mm (non-flush)
switching frequency	3 kHz	1 kHz	500 Hz
housing material	stainless steel 1.4404 (V4A)		
operating temperature	-40 ... +80 °C, cleaning temperature to +100 °C		
protection class	IP 68/69K & <i>proTect+</i>		

Inductive proximity switches

Application-specific inductive sensors – Marine / for off-highway-machinery

- Inductive proximity switches for off-highway machinery – Designed for Reliability
- DNV-GL certified marine sensors



For Off-Highway-machines	IR12V.04S	IR18V.08S
category	compact	compact
features	<ul style="list-style-type: none"> ■ Designed for Reliability ■ Versions with flylead connector German ■ EN 13309, EN ISO 14982:2009, ISO 13766:2006 	
dimensions	M12	M18
nominal sensing distance S_n	4 mm	8 mm
switching frequency	2 kHz	450 kHz
housing material	brass nickel plated	brass nickel plated
operating temperature	-40 ... +85 °C	-40 ... +85 °C
protection class	IP 68 / IP 69K (face)	IP 68 / IP 69K (face)



Marine	IR12.P04S	IR18.P10S
category	compact	compact
features	<ul style="list-style-type: none"> ■ Versions with diagnostic input ■ Marine type approval (according to DNVGL-CG-0339) 	
dimensions	M12	M18
nominal sensing distance S_n	4 mm	10 mm
switching frequency	1 kHz	800 kHz
housing material	stainless steel 1.4404 (V4A)	brass nickel plated, chromium plated
operating temperature	-40 ... +75 °C	-40 ... +75 °C
protection class	IP 67	IP 67
specific features		<ul style="list-style-type: none"> ■ Ecolab-tested ■ FDA-compliant ■ Vibration resistance EN 61373: 2010 (category 3) ■ Shock resistance EN 61373: 2010 (category 3)

Learn more:
www.baumer.com/inductive

Capacitive sensors

Capacitive proximity sensors in metal housing

Proximity switch for non-contact detection of liquid as well as solid objects and bulk solids

- High switching distance up to 30 mm even through non-metallic walls
- Absolutely reliable even when interfered by ambient conditions, e.g. ambient light or dirt
- Absolutely reliable detection of objects such as wafers, PCBs, paper stacks or hot adhesives up to 200 °C



	CFAM 12	CFAM 18	CFAM 30	CFBM 20
category	cylindrical	cylindrical	cylindrical	cylindrical
function				
detection of non-conductive media	■	■	■	■
liquids in direct contact				
fill level detection through container	■	■	■	■
object detection / bulk goods	■	■	■	■
dimensions / height	M12	M18	M30	M20
housing length	60 mm	64 mm	71 mm	79,5 mm
nominal sensing distance S_n	4 mm	8 mm	15 mm	10 mm
switching frequency	50 Hz	50 Hz	50 Hz	50 Hz
output signal	PNP NPN	PNP NPN	PNP NPN	PNP NPN
connection types	cable 2 m connector M12	cable 2 m connector M12	cable 2 m connector M12	cable 2 m
housing material	brass nickel plated	brass nickel plated	brass nickel plated	brass nickel plated
operating temperature	-25 ... +75 °C	-25 ... +75 °C	-25 ... +75 °C	-25 ... +75 °C
protection class	IP 65	IP 65	IP 65	IP 65
specific features	■ potentiometer	■ potentiometer	■ potentiometer	■ potentiometer

Learn more:
www.baumer.com/capacitive



CFAH 30

CFDM 20

cylindrical
 high temperature to
 +200 °C

rectangular



M30

20 mm

65 mm

35 mm

15 mm

5 mm

50 Hz

50 Hz

PNP
 NPN

PNP
 NPN

cable 2 m
 connector M12

connector M8

brass nickel plated

brass nickel plated

-40 ... +200 °C

-25 ... +75 °C

IP 65

IP 65

■ potentiometer

■ Fixed switching distance

Capacitive sensors

Capacitive proximity sensors in plastic housings

Proximity switch for non-contact detection of liquid as well as solid objects and bulk solids

- High switching distance up to 30 mm even through non-metallic walls
- Absolutely reliable even when interfered by ambient conditions, e.g. ambient light or dirt
- Absolutely reliable detection of objects such as wafers, PCBs, paper stacks or hot adhesives up to 200 °C



	CFAK 12 with cap	CFAK 12	CFAK 18	CFAK 22 Oil Level Switch
category	cylindrical	cylindrical	cylindrical	cylindrical
function				
liquids in direct contact	■	■	■	■
detection of non-conductive media			■	
fill level detection through container	■	■	■	■
object detection / bulk goods			■	
dimensions	M12	M12	M18	M22
housing length	39,5 mm	39 mm	63,5 mm	87 mm
nominal sensing distance S_n	0,1 mm	0,5 mm	2 ... 15 mm	
switching frequency	15 Hz	15 Hz	50 Hz	
output signal	PNP NPN	PNP NPN	PNP NPN	voltage output
connection types	cable 2 m flylead connector M8	cable 2 m	cable 2 m	connector AMPSEAL 16 3 pin
housing material	POM EPDM50	PBT	PBT	PA 10T/X
operating temperature	0 ... +50 °C	0 ... +70 °C	-25 ... +75 °C	-40 ... +85 °C
protection class	IP 67	IP 67	IP 67/65	IP 69K
specific features	■ liquid level sensor for wastewater		■ potentiometer	■ liquid level sensor for oil ■ media temperature +100 °C

Capacitive proximity sensors in plastic housings

Learn more:
www.baumer.com/capacitive



CFAK 30	CFDK 25	CFDK 30	CFAM 18
cylindrical	rectangular extremely flat	rectangular	cylindrical
■			■
■	■	■	
■			
■	■	■	■
M30	25 × 52,4 × 6 mm	30 × 65 × 18,5 mm	M18
72 mm			78,5 mm
8 / 30 mm	2 ... 15 mm	4 ... 15 mm	2 ... 8 mm
50 Hz	35 Hz	50 Hz	50 Hz
PNP NPN	push-pull	PNP NPN	PNP NPN
cable 2 m	cable 2 m flylead connector M12	cable 2 m connector M12	cable 2 m connector M12
PBT	PA 12	PBT	brass nickel plated
-25 ... +75 °C	-25 ... +75 °C	-25 ... +75 °C	-25 ... +75 °C
IP 67/65	IP 65	IP 65	IP 65

- versions with fixed switching point
- adjustable versions
- potentiometer

- fixed sensing distance
- flexible mounting options thanks to innovative mounting frame

- potentiometer

- potentiometer

Light barriers and light sensors

Subminiature and miniature sensors

Unique reliable object detection and positioning with optical sensors

- Smart & Small – top performance in smallest designs
- Find the optimum solution quickly through large portfolio
- Easy to set up with clever teach-in function
- Laser sensors for detection tasks in the 0.01 mm range



	FHDK 04	FxDK 07 FxCK 07	FxDM 08	FxAM 08
<i>x</i> = function principle <i>y</i> = light source				
features	<ul style="list-style-type: none"> ■ Mounting in rails ■ Fix sensing distance 	<ul style="list-style-type: none"> ■ World's smallest adjustable sensor family 	<ul style="list-style-type: none"> ■ Fix sensing distance ■ Robust metal housing 	<ul style="list-style-type: none"> ■ Fix sensing distance
dimensions (B × H × T)	4 × 44,8 × 6,2 mm	8 × 16,2 × 10,8 mm	8 × 58 × 12 mm	M8 × 56 mm
function principle (<i>x</i>) / ranges				
diffuse sensors with background suppression	30 mm / 50 mm (FHDK 14)	10 ... 60 mm (FHDK 07 / FHCK 07)		
diffuse sensor with background suppression		20 ... 150 mm (FZDK 07 / FZCK 07)	40 mm / 80 mm (FZDM 08)	40 mm / 80 mm (FZAM 08)
SmartReflect® light barriers without reflector		17 ... 45 mm (FNCK 07)		
SmartReflect® transparent retro-reflective sensors		800 mm (FPDK 07 / FPCK 07)		
transparent detection without reflector				
through beam sensors		2,5 m (FSDK 07 / FSCK 07) (FEDK 07 / FECK 07)	1 m / 3 m (FSDM 08 / FEDM 08)	3 m (FSAM 08 / FEAM 08)
light source (<i>y</i>)				
standard LED (R)	■	■		
pinPoint LED (P)				
infrarot (I)			■	■
laser (L)				
response time	< 0,5 ms	< 0,5 ms	< 1 ms	< 2,5 ms
output	push-pull	PNP NPN	PNP	PNP
connection types	cable 2 m flylead connector M8	cable 2 m flylead connector M8	cable 2 m connector M8	cable 2 m connector M8
housing material	plastic	plastic	aluminium	brass nickel plated
operating temperature	-10 ... +50 °C	-20 ... +50 °C	-25 ... +65 °C	-25 ... +65 °C
protection class	IP 65	IP 65	IP 65	IP 65

Light barriers and light sensors – Subminiature and miniature sensors

Learn more:
www.baumer.com/opto



IO-Link

O200.xy



FxDK 10
OxDK 10 (laser)



FxDM 12
OxDM 12 (laser)



FxAM 12

- V-optics for shiny objects and High-Power-Mode for very dark objects

- Different beam cones optimized for the application

- Sensing distance adjustable
- Sensors with single lens optics

- Sensitivity adjustable with potentiometer

8 × 21 × 14,1 mm

10,4 × 27 × 14 mm

12,4 × 35 × 35 mm

M12 × 70,5 mm

10 ... 120 mm

10 ... 130 mm
(FHDK 10 / OHDK 10)

15 ... 300 mm
(FHDM 12 / OHDM 12)

3 ... 200 mm
(FZDK 10 / OZDK 10)

30 ... 200 mm
(FZAM 12)

3 ... 180 mm

4 m

4 m
(FPDK 10)

8 m
(FPDM 12 / OPDM 12)

6 m

10 m
(FSDK 10 / FEDK 10)
(OSDK 10 / OEDK 10)

7,5 m
(FSDM 12 / FEDM 12)

-
-

-

-

-

< 0,25 ms

< 0,5 ms
< 0,05 ms (Laser)

< 1 ms
< 0,05 ms (laser)

< 1 ms

push-pull
PNP
NPN

push-pull
PNP
NPN

PNP
NPN

PNP

cable 2 m
connector M8

cable 2 m
connector M8
flylead connector M8

cable 2 m
connector M8

cable 2 m
connector M12

plastic

plastic

die-cast zinc

brass nickel plated

-25 ... +50 °C

-25 ... +65 °C
-10 ... +50 °C (laser)

-25 ... +65 °C
-20 ... +50 °C (laser)

-25 ... +65 °C

IP 67

IP 65 / IP 67

IP 67

IP 65

Light barriers and light sensors

Subminiature and miniature sensors

Unique reliable object detection and positioning with optical sensors

- Smart & Small – top performance in smallest designs
- Find the optimum solution quickly through large portfolio
- Easy to set up with clever teach-in function
- Laser sensors for detection tasks in the 0.01 mm range



IO-Link

O300.xy



IO-Link

O300.xy Line



OHDM 13 (laser)

x = function principle

y = light source

features

■ Setting via wear-free *qTeach*[®] or IO-Link

■ Up to 100 mm long time

■ Sensing distance adjustable

dimensions (B × H × T)

12,9 × 32,3 × 23 mm

12,9 × 32,3 × 23 mm

13,4 × 48,2 × 40 mm

function principle (x) / ranges

diffuse sensors with background suppression

30 ... 300 mm (O300.Gy)

30 ... 180 mm (O300.Gy)

50 ... 550 mm (OHDM 13)

diffuse sensor with background suppression

10 ... 400 mm (O300.Zy)

SmartReflect[®] light barriers without reflector

30 ... 300 mm (O300.Sy)

30 ... 120 mm (O300.Sy)

SmartReflect[®] transparent

30 ... 300 mm (O300.SPT)

retro-reflective sensors

6 m (O300.Ry)

transparent detection without reflector

4 m (O300.RPT)

through beam sensors

15 m (O300.Ty / O300.Ey)

light source (y)

standard LED (R)

■

■

pinPoint LED (P)

■

■

infrarot (I)

■

laser (L)

■

■

■

response time

< 0,25 ms
< 0,1 ms (laser)

< 1,5 ms

< 5 ms

output

push-pull
PNP
NPN

push-pull

PNP
NPN

connection types

cable 2 m
connector M8
flylead connector

cable 2 m
connector M8

connector M8

housing material

plastic

plastic

aluminum

operating temperature

-25 ... +60 °C
-10 ... +60 °C (laser)

-25 ... +60 °C
-10 ... +60 °C (laser)

0 ... +50 °C

protection class

IP 67

IP 67

IP 67

Learn more:
www.baumer.com/opto

Light barriers and light sensors

Standard sensors – rectangular and cylindrical

Unique reliable object detection and positioning with optical sensors

- Find the optimum solution quickly through large portfolio
- Easy to set up with clever teach-in function
- Laser sensors for detection tasks in the 0.01 mm range



	FxDK 14 OxDK 14 (laser)	FxDM 16 OxDM 16 (laser)	OR18.xy	OR18.GR.F
IO-Link				
x = function principle y = light source				
features	■ Sensors for transparent objects	■ Laser sensors for wafer detection	■ Setting via potentiometer, teach-in or <i>qTeach</i>	■ Fixed Focus
dimensions (B × H × T)	14,8 × 43 × 31 mm	15,4 × 50 × 50 mm	M18	M18 × 48,3 mm
function principle (x) / ranges				
diffuse sensors with background suppression	20 ... 500 mm (FHDK 14 / OHDK 14)	20 ... 600 mm (FHDM 16 / OHDM 16)	40 ... 200 mm (OR18.Gy)	50 mm (OR18.GR.F)
diffuse sensors with intensity difference	5 ... 600 mm (FZDK 14 / OZDK 14)	0 ... 400 mm (FZDM 16 / OZDM 16)	0 ... 800 mm (OR18.ZI)	
<i>SmartReflect</i> ® light barriers without reflector	50 ... 800 mm (FNDK 14)		55 ... 300 mm (OR18.SP)	
<i>SmartReflect</i> ® transparent				
retro-reflective sensors	11 m (FRDK / FPDK / OPDK 14)	12 m (FPDM 16 / OPDM 16)	16 m (OR18.RR)	
transparent detection without reflector			800 mm (OR18.RR.T)	
through beam sensors	15 m (FSDK 14 / FEDK 14) (OSDK 14 / OEDK 14)		60 m (OR18.TI / OR18.EI)	
light source (y)				
standard LED (R)	■	■	■	■
pinPoint LED (P)			■	
infrarot (I)			■	
laser (L)	■	■	■	
response time	< 0,5 ms < 0,25 ms (laser)	< 1 ms < 0,05 ms (laser)	< 0,5 ms < 0,1 ms (laser)	< 0,5 ms
output	push-pull PNP NPN	PNP NPN 4 ... 20 mA	PNP NPN	PNP NPN
connection types	cable 2 m connector M8 flylead connector M12	cable 2 m connector M12	cable 2 m connector M12 flylead connector M12	cable 2 m connector M12
housing material	plastic	die-cast zinc	plastic brass nickel plated	plastic
operating temperature	-25 ... +65 °C -10 ... +50 °C (laser)	-25 ... +65 °C -10 ... +50 °C (laser)	-25 ... +55 °C -10 ... +55 °C (laser)	-25 ... +55 °C
protection class	IP 67	IP 67	IP 67	IP 65 / IP 67

Light barriers and light sensors – rectangular and cylindrical

Learn more:
www.baumer.com/opto



FzAM 18

O500.xy

OHDM 20 (Laser)

OxDK 25 (Laser)

- Compatible with glass fibre optics

- Setting via wear-free *qTeach*® or IO-Link

- Light / dark operate switchable

- Sensors with 2 output *qTeach*®

M18

18 × 45 × 32 mm

20,6 × 65 × 50 mm

23,4 × 63 × 45 mm

60 ... 430 mm
(FzAM 18)

60 ... 550 mm
(O500.Gy)
20 ... 600 mm
(O500.Zy)

210 ... 1500 mm
(OHDM 20)

100 ... 1750 mm
(OHDK 25)

60 ... 600 mm
(O500.SP)

1900 mm
(ONDK 25)

60 ... 1000 mm
(O500.Sy.T)

4 m
(FPAM 18)

8 m
(O500.Ry)
6 m
(O500.RP.T)
40 m
(O500.TR / O500.ER)

■

■

■

■

■

■

< 1 ms

< 0,25 ms

< 6 ms

10 ms

PNP
NPN

push-pull
PNP
NPN

PNP

push-pull

cable 2 m
connector M12

cable 2 m
connector M12

connector M12

cable 2 m
connector M12

brass nickel plated

plastic

die-cast zinc

plastic

-25 ... +55 °C

-25 ... +60 °C

0 ... +50 °C

0 ... +50 °C

IP 67

IP 67

IP 67

IP 67

Light barriers and light sensors

Standard with extra power – O300/O500

Unique portfolio with extra performance for your application

- Enhanced processor performance for reliable detection
- 2500 variants with seven sensor principles and four light sources
- Easy implementation and operation
- IO-Link – Industry 4.0 and IIoT-ready



IO-Link

O300.xy



IO-Link


O300W.xy



IO-Link

O300H.xy

O300.xy x = function principle y = light source	O300.xy	O300W.xy	O300H.xy
features	■ Setting via wear-free <i>qTeach</i> [®] or IO-Link	■ Stainless steel housing in washdown design ■ Safe setting via wear-free <i>qTeach</i> [®] or IO-Link	■ Stainless steel housing in hygienic design ■ Safe setting via wear-free magnetic <i>qTeach</i> [®] or IO-Link
dimensions (B × H × T)	12,9 × 32,3 × 23 mm	16,5 × 34,7 × 28,2 mm	16,5 × 34,6 × 28,7 mm
function principle (x) / ranges			
diffuse sensors	30 ... 300 mm	30 ... 250 mm	30 ... 250 mm
background suppression (G)	(O300.Gy)	(O300W.Gy)	(O300H.Gy)
diffuse sensors with intensity difference (Z)	10 ... 400 mm		
	(O300.Zy)		
<i>SmartReflect</i> [®] light barriers without a reflector (S)	30 ... 300 mm	30 ... 300 mm	30 ... 300 mm
	(O300.Sy)	(O300W.Sy)	(O300H.Sy)
<i>SmartReflect</i> [®] transparent (Sy.T)	30 ... 300 mm	30 ... 300 mm	30 ... 300 mm
	(O300.SP.T)	(O300W.SP.T)	(O300H.SP.T)
diffuse sensors (R)	6 m	6 m	6 m
	(O300.Ry)	(O300W.Ry)	(O300H.Ry)
retro-reflective sensors (Ry. T)	4 m	4 m	4 m
	(O300.RP.T)	(O300W.RP.T)	(O300H.Ry.T)
through beam sensors (T / E)	15 ... 75 m	15 ... 75 m	15 ... 75 m
	(O300.Ty / O300.Ey)	(O300W.Ty / O300W.Ey)	(O300H.Ty / O300H.Ey)
light source (y)			
standard LED (R)	■	■	■
pinPoint LED (P)	■	■	■
infrarot (I)	■		
laser (L)	■	■	■
response time	< 0,25 ms < 0,1 ms (laser)	< 0,25 ms < 0,1 ms (laser)	< 0,25 ms < 0,1 ms (laser)
output	push-pull PNP NPN	push-pull	push-pull
connection types	cable 2 m connector M8 flylead connector M8	connector M8	connector 2 m flylead connector M8
housing material	plastic	stainless steel, Ecolab-certified, FDA-compliant	stainless steel, Ecolab-certified, EHEDG-compliant, FDA-compliant
operating temperature	-25 ... +60 °C -10 ... +60 °C (laser)	-25 ... +60 °C -10 ... +60 °C (laser)	-25 ... +60 °C -10 ... +60 °C (laser)
protection class	IP 67	IP 68 / IP 69K <i>proTect</i> ⁺	IP 68 / IP 69K <i>proTect</i> ⁺



Learn more:
www.baumer.com/opto



IO-Link



IO-Link



IO-Link

O500.xy x = function principle y = light source	O500.xy	O500W.xy	O500H.xy
features	<ul style="list-style-type: none"> Setting via wear-free <i>qTeach</i>[®] or IO-Link 	<ul style="list-style-type: none"> Stainless steel housing in washdown design Safe setting via wear-free <i>qTeach</i>[®] or IO-Link 	<ul style="list-style-type: none"> Stainless steel housing in hygienic design Safe setting via wear-free magnetic <i>qTeach</i>[®] or IO-Link
dimensions (B × H × T)	18 × 45 × 32 mm	20,2 × 47,2 × 37,2 mm	20,2 × 47,7 × 36,4 mm
function principle (x) / ranges			
diffuse sensors	60 ... 550 mm	60 ... 400 mm	60 ... 400 mm
background suppression (G)	(O500.Gy)	(O500W.Gy)	(O500H.Gy)
diffuse sensors with intensity difference (Z)	20 ... 600 mm		
	(O500.Zy)		
<i>SmartReflect</i> [®] light barriers without a reflector (S)	60 ... 600 mm	60 ... 600 mm	60 ... 600 mm
	(O500.SP)	(O500W.SP)	(O500H.SP)
<i>SmartReflect</i> [®] transparent (Sy.T)	60 ... 1000 mm	60 ... 1000 mm	60 ... 1000 mm
	(O500.SP.T)	(O500W.SP.T)	(O500H.SP.T)
diffuse sensors (R)	8 m	8 m	8 m
	(O500.Ry)	(O500W.Ry)	(O500H.Ry)
retro-reflective sensors (Ry. T)	6 m	6 m	6 m
	(O500.RP.T)	(O500W.RP.T)	(O500H.RP.T)
through beam sensors (T / E)	40 m	40 m	40 m
	(O500.TR / O500.ER)	(O500W.TR / O500W.ER)	(O500H.TR / O500H.ER)
light source (y)			
standard LED (R)	■	■	■
pinPoint LED (P)	■	■	■
infrarot (I)	■		
laser (L)			
response time	< 0,25 ms	< 0,25 ms	< 0,25 ms
output	push-pull PNP NPN	push-pull	push-pull
connection types	cable 2 m connector M12	connector M12	cable 2 m connector M12
housing material	plastic	stainless steel, Ecolab-certified, FDA-compliant	stainless steel, Ecolab-certified, EHEDG-compliant, FDA-compliant
operating temperature	–25 ... +60 °C	–25 ... +60 °C	–25 ... +60 °C
protection class	IP 67	IP 68 / IP 69K <i>proTect</i> ⁺	IP 68 / IP 69K <i>proTect</i> ⁺

Light barriers and light sensors

Laser sensors

Precise control of fast processes and detection of very small objects

- Very precise object positioning to within 0.01 mm
- Detection of very small objects thanks to focused 0.1 mm laser spot
- Detection of fast objects thanks to short response times of < 0.1 ms
- The right shapes, sizes and sensor principles for your application



	OxDK 10	OxDM 12	OBDM 12 Difference sensors	OHDM 13
<i>x</i> = function principle				
features	<ul style="list-style-type: none"> ■ Different application-optimized beam shapes 	<ul style="list-style-type: none"> ■ Adjustable ranges ■ Sensors with single lens optics 	<ul style="list-style-type: none"> ■ 5 functions (e.g. window teach) 	<ul style="list-style-type: none"> ■ Adjustable ranges
dimensions (B × H × T)	10,4 × 27 × 14 mm	12,4 × 35 × 35 mm	12,4 × 37 × 34,5 mm	13,4 × 48,2 × 40 mm
function principle (<i>x</i>) / ranges				
diffuse sensors	20 ... 130 mm	17 ... 120 mm		50 ... 550 mm
background suppression	(OHDK 10)	(OHDM 12)		(OHDM 13)
diffuse sensors with intensity difference	3 ... 150 mm			
	(OZDK 10)			
<i>SmartReflect</i> [®] light barriers without a reflector				
retro-reflective sensors		8 m		
		(OPDM 12)		
retro-reflective sensors for transparent detection				
through beam sensors	10 m			
	(OSDK / OEDK 10)			
differential sensors			16 ... 120 mm	
			(OBDM 12)	
laser class	1 & 2	2	2	2
response time up	< 0,05 ms	< 0,05 ms	< 1 ms	< 5 ms
output	PNP NPN	PNP NPN	PNP NPN	PNP NPN
housing material	plastic	die-cast zinc	die-cast zinc	aluminum
operating temperature	-10 ... +50 °C	0 ... +50 °C	0 ... +50 °C	0 ... +50 °C
protection class	IP 65 / IP 67	IP 67	IP 67	IP 67

Learn more:
www.baumer.com/laser



OxDK 14

IO-Link

O300.xL

IO-Link

O300W.xL

IO-Link

O300H.xL

■ Mechanical sensing distance adjustment

■ Setting via wear-free magnetic *qTeach*® or IO-Link

■ Setting via wear-free *qTeach*® or IO-Link

■ Setting via wear-free magnetic *qTeach*® or IO-Link

14,8 × 43 × 31 mm

12,9 × 32,3 × 23 mm

16,5 × 34,7 × 28,2 mm

16,5 × 34,6 × 28,7 mm

20 ... 350 mm
(OHDK 14)

30 ... 300 mm
(O300.GL)

30 ... 250 mm
(O300W.GL)

30 ... 250 mm
(O300H.GL)

10 ... 400 mm
(O300.ZL)

30 ... 300 mm
(O300.SL)

30 ... 300 mm
(O300W.SL)

30 ... 300 mm
(O300H.SL)

11 m
(OPDK 14)

6 m
(O300.RL)

6 m
(O300W.RL)

6 m
(O300H.RL)

5,2 m
(OPDK 14)

75 m
(O300.TL / O300.EL)

75 m
(O300W.TL / O300W.EL)

75 m
(O300H.TL / O300H.EL)

2

1

1

1

< 0,15 ms

< 0,1 ms

< 0,1 ms

< 0,1 ms

PNP
NPN

PNP
NPN
push-pull

push-pull

push-pull

plastic

plastic

stainless steel

stainless steel

-10 ... +50 °C

-25 ... +60 °C

-25 ... +60 °C

-25 ... +60 °C

IP 67

IP 67
IP 68 / IP 69K
proTect+

IP 67
IP 68 / IP 69K
proTect+

IP 67
IP 68 / IP 69K
proTect+

Light barriers and light sensors

Laser sensors

Precise control of fast processes and detection of very small objects

- Very precise object positioning to within 0.01 mm
- Detection of very small objects thanks to focused 0.1 mm laser spot
- Detection of fast objects thanks to short response times of < 0.1 ms
- The right shapes, sizes and sensor principles for your application



x = function principle	OxDM 16	OHDM 20	OxDK 25	OR18.EL/TL
features	■ Sensors for wafer detection	■ Large range	■ Sensors with two outputs	■ Short response time ■ Large range
dimensions (B × H × T)	15,4 × 50 × 50 mm	20,6 × 65 × 50 mm	23,4 × 63 × 45 mm	M18
function principle (x) / ranges				
diffuse sensors background suppression	25 ... 300 mm (OHDM 16)	210 ... 1500 mm	100 ... 1750 mm (OHDK 25)	
diffuse sensors with intensity difference	0 ... 250 mm (OZDM 16)			10 ... 300 mm (OR18.ZL)
SmartReflect® light barriers without a reflector			100 ... 1900 mm (ONDK 25)	
retro-reflective sensors	12 m (OPDM 16)			16 m (OR18.RL)
retro-reflective sensors for transparent detection				
through beam sensors				60 m (OR18.EL/TL)
differential sensors				
laser class	2	2	1	1
response time up	< 0,1 ms	< 6 ms	< 10 ms	< 0,34 ms
output	PNP NPN	PNP	push-pull	PNP NPN
housing material	die-cast zinc	die-cast zinc	plastic	brass nickel plated
operating temperature	-10 ... +50 °C	-10 ... +50 °C	-10 ... +50 °C	-10 ... +55 °C
protection class	IP 67	IP 67	IP 67	IP 67

Learn more:
www.baumer.com/laser

Light barriers and light sensors

Light barriers without reflector – *SmartReflect*®

Less is more – reduced operating costs with increased functional reliability

- Reliable barrier principle between the sensor and the machine part
- Suitable for objects of different color, surface or transparency
- Robust with dirt deposit in plastic, stainless steel or hygiene design
- Powerful with < 0.25 ms response time and up to 1.9 m range
- Simple and cost-effective in installation and operation without reflector



	FNDK 07 FNCK 07	O200.xy	IO-Link O300.Sy O300.Sy.T	IO-Link O500.Sy O500.Sy.T
y = light source				
features	<ul style="list-style-type: none"> ■ Miniature sensor ■ Sensing distance adjustable 	<ul style="list-style-type: none"> ■ V-optics for shiny objects and High-Power-Mode for very dark objects 	<ul style="list-style-type: none"> ■ Miniature sensor ■ Transparent detection versions 	<ul style="list-style-type: none"> ■ Transparent detection versions
dimensions (B × H × T)	8 × 16,2 × 10,8 mm	8 × 21 × 14,2 mm	12,9 × 32,2 × 23 mm	18 × 45 × 32 mm
light source (y)				
standard LED (R)	17 ... 45 mm	30 ... 180 mm		
pinPoint LED (P)			30 ... 300 mm (O300.SP / O300.SP.T)	60 ... 600 mm (O500.SP) 30 ... 1000 mm (O500.SP.T)
infrarot (I)				
laser (L)			30 ... 250 mm (O300.SL)	
response time	< 0,5 ms	< 0,25 ms	< 0,25 ms	< 0,25 ms
output	PNP NPN	push-pull PNP NPN	push-pull PNP NPN	push-pull PNP NPN
connection types	cable 2 m flylead connector M8	cable 2 m connector M8	cable 2 m connector M8 flylead connector M8	cable 2 m connector M12
housing material	plastic	plastic	plastic	plastic
operating temperature	-20 ... +50 °C	-25 ... +50 °C	-25 ... +60 °C	-25 ... +60 °C
protection class	IP 65	IP 67	IP 67	IP 67

Light barriers without reflector – *SmartReflect*®

Learn more:
www.baumer.com/smartreflect



IO-Link

FNDK 14

- Transparent detection versions

14,8 × 43 × 31 mm

50 ... 800 mm

< 1,8 ms

push-pull

cable 2 m
connector M8
flylead connector M12

plastic

–30 ... +65 °C

IP 67



ONDK 25

- Standard

23,4 × 63 × 45 mm

1900 mm

< 10 ms

push-pull

cable 2 m
connector M12

plastic

0 ... +50 °C

IP 67



OR18.SP

- Standard sensor M18

M18 × 65 mm

55 ... 300 mm

< 0,49 ms

push-pull
PNP
NPN

connector M12

brass nickel plated

–25 ... +60 °C

IP 67



IO-Link

O300W.Sy
O300W.Sy.T

- Washdown design
- Transparent detection versions

16,5 × 34,7 × 28,2 mm

30 ... 300 mm
(O300W.SP / O300W.SP.T)

30 ... 250 mm
(O300W.SL)

< 0,25 ms

push-pull

connector M8

stainless steel, Ecolab-
certified, FDA-compliant

–25 ... +60 °C

IP 68 / IP 69K
proTect+



IO-Link

O500W.Sy
O500W.Sy.T

- Washdown design
- Transparent detection versions

20,2 × 47,2 × 37,7 mm

60 ... 600 mm
(O500W.SP)
30 ... 1000 mm
(O500W.SP.T)

< 0,25 ms

push-pull

connector M12

stainless steel, Ecolab-
certified, FDA-compliant

–25 ... +60 °C

IP 68 / IP 69K
proTect+

Light barriers and light sensors

Light barriers without reflector – *SmartReflect*[®]

Less is more – reduced operating costs with increased functional reliability

- Reliable barrier principle between the sensor and the machine part
- Suitable for objects of different color, surface or transparency
- Robust with dirt deposit in plastic, stainless steel or hygiene design
- Powerful with < 0.25 ms response time and up to 1.9 m range
- Simple and cost-effective in installation and operation without reflector



IO-Link

FNDR 14



IO-Link

O300H.Sy
O300H.Sy.T



IO-Link

O500H.Sy
O500H.Sy.T



IO-Link

FNDH 14

y = light source	FNDR 14	O300H.Sy O300H.Sy.T	O500H.Sy O500H.Sy.T	FNDH 14
features	■ Washdown design	■ Hygienic design ■ Version for transparency object detection	■ Hygienic design ■ Version for transparency object detection	■ Hygienic design ■ Version for transparency object detection
dimensions (B × H × T)	19,6 × 51 × 34,3 mm	16,5 × 34,6 × 28,7 mm	20,2 × 47,7 × 36,4 mm	19,6 × 52,2 × 34,3 mm
light source (y)				
standard LED (R)				
pinPoint LED (P)	50 ... 800 mm	30 ... 300 mm (O300H.SP / O300H.SPT)	60 ... 600 mm (O500H.SP) 60 ... 1000 mm (O500H.SPT)	50 ... 800 mm
laser (L)	30 ... 250 mm	30 ... 250 mm (O300H.SL)		1900 mm
response time	< 1,8 ms	< 0,25 ms	< 0,25 ms	< 1,8 ms
output	push-pull	push-pull	push-pull	push-pull
connection types	connector M12	connector M8	connector M12	cable 2 m connector M12
housing material	stainless steel, Ecolab-certified, EHEDG-compliant, FDA-compliant	stainless steel, Ecolab-certified, EHEDG-compliant, FDA-compliant	stainless steel, Ecolab-certified, EHEDG-compliant, FDA-compliant	stainless steel, Ecolab-certified, EHEDG-compliant, FDA-compliant
operating temperature	–30 ... +60 °C	–25 ... +60 °C	–25 ... +60 °C	–30 ... +60 °C
protection class	IP 68 / IP 69K <i>proTect+</i>	IP 68 / IP 69K <i>proTect+</i>	IP 68 / IP 69K <i>proTect+</i>	IP 68 / IP 69K <i>proTect+</i>


Learn more:
www.baumer.com/smartreflect

SmartReflect[®] – the light barrier without reflector

With *SmartReflect*[®] Baumer has reinvented the optical light barrier: The reflector as the weak point is eliminated and highly reliable object detection is still guaranteed even for transparent objects. That reduces your costs tremendously.

Your benefits

- Maximum system uptime and process safety
 - Very reliable object detection thanks to barrier principle
 - Elimination of the reflector as a potential source of error
 - No function impairment through dirt accumulation
 - Available in robust washdown or hygiene design
- Reduction of operating costs
 - No reflector means time saving installation
 - No need for a reflector eliminates exchange and wear
 - No need for a reflector eliminates cleaning effort
- Raising productivity
 - Sensing range up to 1.9 m or 1 m for transparent objects
 - High machine performance thanks to short response times of < 0.25 ms
 - Fast format changes, easy sensor exchange and additional usage data via IO-Link

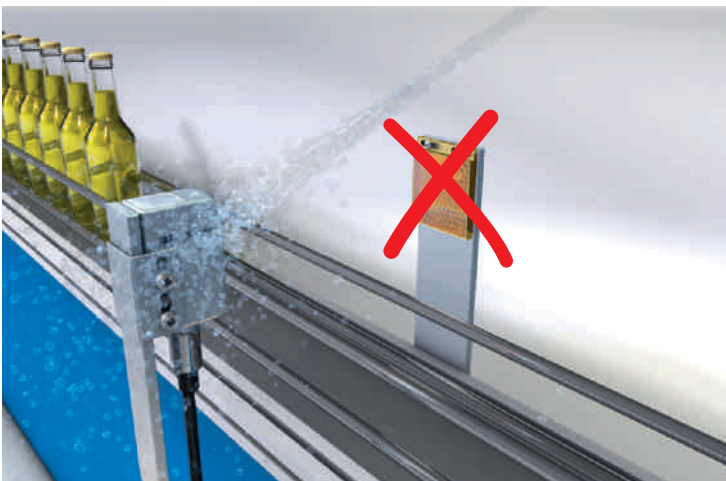

Light barriers and light sensors

Transparent detection

The sensor solutions for the detection of bowls, bottles and foils

- Extremely safe and fast with a response time < 0.25 ms
- Unique range without reflector up to 1 m
- Up to 7 m range with retro-reflective light barriers
- In plastic, hygiene or washdown design, depending on the surroundings



IO-Link

O300.S.P.T



IO-Link

O300.R.P.T



IO-Link

FNDK 14



FRDK 14

y = light source

features

SmartReflect®

Retro-reflective sensors

SmartReflect®

Retro-reflective sensors

dimensions (B × H × T)

12,9 × 32,3 × 23 mm

12,9 × 32,3 × 23 mm

14,8 × 43 × 31 mm

14,8 × 43 × 31 mm

light source (y)

standard LED (R)

pinPoint LED (P)

30 ... 300 mm

4 m

200 ... 800 mm

8 m

infrarot (I)

laser (L)

response time

< 0,25 ms

< 0,25 ms

< 1,8 ms

< 0,25 ms

output

push-pull

push-pull

push-pull

push-pull

connection types

cable 2 m
connector M8

cable 2 m
connector M8

cable 2 m
connector M8
connector M12

cable 2 m
connector M8

housing material

plastic

plastic

plastic

plastic

operating temperature

-25 ... +60 °C

-25 ... +60 °C

-30 ... +60 °C

-25 ... +60 °C

protection class

IP 67

IP 67

IP 67

IP 68 / IP 69K
proTect+

Learn more:
www.baumer.com/transparent



IO-Link

IO-Link

Light barriers and light sensors

Transparent detection in demanding environments

Robust stainless steel sensors for the detection of bowls, bottles and foils

- Extremely safe and fast with a response time < 0.25 ms
- Unique range without reflector up to 1 m
- Up to 7 m range with retro-reflective light barriers
- In plastic, hygiene or washdown design, depending on the surroundings



IO-Link

O300W.SPT
O300H.SPT



IO-Link

O300W.RP.T
O300H.RP.T



IO-Link

FNDR 14
FNDH 14



IO-Link

O500W.SPT
O500H.SPT

y = light source

features

- *SmartReflect*[®]
- Stainless steel housing in washdown- (W) or hygienic design (H)

- Retro-reflective sensors
- Stainless steel housing in washdown- (W) or hygienic design (H)

- *SmartReflect*[®]
- Stainless steel housing in washdown- (W) or hygienic design (H)

- *SmartReflect*[®]
- Stainless steel housing in washdown- (W) or hygienic design (H)

dimensions (B × H × T)

16,5 × 34,7 × 28,2 mm

16,5 × 34,7 × 28,2 mm

16,5 × 51 × 34,3 mm

20,2 × 124 × 36,4 mm

light source (y)

standard LED (R)

pinPoint LED (P)

infrarot (I)

laser (L)

30 ... 300 mm

4 m

20 ... 800 mm

60 ... 1000 mm

response time

< 0,25 ms

< 0,25 ms

< 0,25 ms

< 0,25 ms

output

push-pull

push-pull

push-pull

push-pull

connection types

cable 2 m
connector M8

cable 2 m
connector M8

cable 2 m
connector M8
connector M12

cable 2 m
connector M12

housing material

stainless steel, Ecolab-certified, EHEDG-compliant (hygienic), FDA-compliant

stainless steel, Ecolab-certified, EHEDG-compliant (hygienic), FDA-compliant

stainless steel, Ecolab-certified, EHEDG-compliant (hygienic), FDA-compliant

stainless steel, Ecolab-certified, EHEDG-compliant (hygienic), FDA-compliant

operating temperature

−25 ... +60 °C

−25 ... +60 °C

−30 ... +60 °C

−25 ... +60 °C

protection class

IP 68 / IP 69K
proTect+

IP 68 / IP 69K
proTect+

IP 68 / IP 69K
proTect+

IP 68 / IP 69K
proTect+

Transparent detection in demanding environments

Learn more:
www.baumer.com/transparent



IO-Link

O500W.R.P.T
 O500H.R.P.T



OR18.W.RR.T

- Retro-reflective sensors
- Stainless steel housing in washdown- (W) or hygienic design (H)

- Retro-reflective sensors
- Stainless steel housing in washdown- (W)

20,2 × 124 × 36,4 mm

M18 × 67,2 mm

6 m

800 mm

< 0,25 ms

< 1 ms

push-pull

PNP
 NPN

cable 2 m
 connector M12

connector M12

stainless steel, Ecolab-certified, EHEDG-compliant (hygienic), FDA-compliant

stainless steel

-25 ... +60 °C

-25 ... +55 °C

IP 68 / IP 69K
proTect+

IP 67/69K



The *proTect+* impermeability concept by Baumer ensures absolute dependability even under most adverse conditions. Thanks to the specifically conceived construction and the use of high-quality materials, sensors with *proTect+* provide IP 69K protection and ensure absolute stability even after countless temperature cycles. In order to achieve this, the sensors have been shock-tested over the entire temperature range. The *proTect+* concept ensures enhanced reliability and extended sensor service life.

Light barriers and light sensors

Washdown design

- Robust stainless steel housing
- Long-term sealing thanks to *proTect+*
- IP 69K and Ecolab tested
- Different sizes and sensor principles
- Benefits by *SmartReflect*® light barrier without reflector



IO-Link



IO-Link



IO-Link



IO-Link

x = function principle y = light source	FxDR 14	O300W.xy	O500W.xy	OR18W.xy
dimensions (B × H × T)	19,6 × 62,4 × 34,3 mm	16,5 × 34,7 × 28,2 mm	20,2 × 47,2 × 37,7 mm	M18
function principle (x) / ranges				
diffuse sensors with background suppression	50 ... 400 mm (FHDR 14)	30 ... 250 mm (O300W.GP / O300W.GL)	60 ... 400 mm (O500W.GP)	40 ... 120 mm (OR18W.GR)
diffuse sensors with intensity difference				0 ... 800 mm (OR18W.ZI)
<i>SmartReflect</i> ® light barriers without reflector	50 ... 800 mm (FNDR 14)	30 ... 300 mm (O300W.SP / O300W.SL)	60 ... 600 mm (O500W.SP)	
<i>SmartReflect</i> ® transparent	200 ... 800 mm (FNDR 14)	30 ... 300 mm (O300W.SP.T)	60 ... 1000 mm (O500W.SP.T)	
retro-reflective sensors	3 m (FPDR 14)	6 m (O300W.RP / O300W.RL)	8 m (O500W.RP)	4,5 m (OR18W.RR)
transparent detection without reflector		4 m (O300W.RP.T)	6 m (O500W.RP.T)	800 mm (OR18W.RR.T)
through beam sensors		15 m (O300W.TR / .TL) (O300W.ER / .EL)	40 m (O500W.TR / .TL) (O500W.ER / .EL)	20 m (OR18W.TI) (OR18W.EI)
contrast sensor	12,5 mm ±2 mm (FKDR 14)			
light source (y)				
standard LED (R)	■	■	■	■
pinPoint LED (P)	■	■	■	
infrarot (I)				■
laser (L)		■		
response time	< 1 ms <0,05 ms (contrast)	< 0,25 ms < 0,1 ms (laser)	< 0,25 ms	< 1 ms
output	push-pull	push-pull	push-pull	PNP NPN
connection types	connector M12	connector M8	connector M12	connector M12
housing material	stainless steel, Ecolab-certified, FDA-compliant	stainless steel, Ecolab-certified, FDA-compliant	stainless steel, Ecolab-certified, FDA-compliant	stainless steel, Ecolab-certified, FDA-compliant
operating temperature	-25 ... +60 °C	-25 ... +60 °C	-25 ... +60 °C	-25 ... +55 °C
protection class	IP 68 / IP 69K <i>proTect+</i>	IP 68 / IP 69K <i>proTect+</i>	IP 68 / IP 69K <i>proTect+</i>	IP 67 / IP 69K

Hygienic design

- EHEDG certified, FDA-compliant, Ecolab tested
- Long-term sealing thanks to *proTect+*
- Different sizes and sensor principles
- Benefits through *SmartReflect®* light barrier without reflector



Learn more:
www.baumer.com/opto



IO-Link



IO-Link



IO-Link

x = function principle y = light source	FxDH 14	O300H.xy	O500H.xy
dimensions (B × H × T)	19,6 × 52,2 × 34,3 mm	16,5 × 34,6 × 28,7 mm	20,2 × 47,7 × 36,4 mm
function principle (x) / ranges			
diffuse sensors with background suppression	50 ... 400 mm (FHDH 14)	30 ... 250 mm (O300H.Gy)	60 ... 400 mm (O500H.Gy)
diffuse sensors with intensity difference			
<i>SmartReflect®</i> light barriers without reflector	50 ... 800 mm (FNDH 14)	30 ... 300 mm (O300H.Sy)	60 ... 600 mm (O500H.Sy)
<i>SmartReflect®</i> transparent	200 ... 800 mm (FNDH 14)	30 ... 300 mm (O300H.SPT)	60 ... 1000 mm (O500H.SPT)
retro-reflective sensors	3,5 m (FPDH 14)	6 m (O300H.Ry)	8 m (O500H.Ry)
transparent detection without reflector		4 m (O300H.RPT)	6 m (O500H.RPT)
through beam sensors		15 m (O300H.Ty) (O300H.Ey)	40 m (O500H.Ty) (O500H.Ey)
contrast sensor	12,5 m ±2 mm (FKDH 14)		
light source (y)			
standard LED (R)	■	■	■
pinPoint LED (P)	■	■	■
infrarot (I)			
laser (L)		■	
response time	< 1 ms <0,05 ms (contrast)	< 0,25 ms <0,1 ms (laser)	< 0,25 ms
output	push-pull	push-pull	push-pull
connection types	connector 2 m flylead connector M12	connector 2 m flylead connector M8	connector 2 m flylead connector M12
housing material	stainless steel, Ecolab-certified, EHEDG-compliant, FDA-compliant	stainless steel, Ecolab-certified, EHEDG-compliant, FDA-compliant	stainless steel, Ecolab-certified, EHEDG-compliant, FDA-compliant
operating temperature	-30 ... +60 °C	-25 ... +60 °C -10 ... +60 °C (Laser)	-25 ... +60 °C
protection class	IP 68 / IP 69K <i>proTect+</i>	IP 68 / IP 69K <i>proTect+</i>	IP 68 / IP 69K <i>proTect+</i>

Light barriers and light sensors

Fork and angle sensors

- Quick response times up to 0,125 ms
- High repeat accuracy
- Robust metal housing
- Narrow parallel light beam
- Smallest detectable object 0,05 mm
- Different gap widths 20 ... 158 mm
- Output PNP/NPN



	FGUM with	OGUM basic	OGUM	FGLM
category	Pulsed red LED Fork sensors	Laser Fork sensors	Laser Fork sensors	Angle sensors L profile
features	<ul style="list-style-type: none"> ■ Potentiometer or Teach-in version ■ Narrow, virtually parallel light beam ■ Sensors can be mounted side-by-side 	<ul style="list-style-type: none"> ■ High resolution ■ Short response time ■ Sensors can be mounted side-by-side 	<ul style="list-style-type: none"> ■ Very high resolution ■ Extremely narrow laser light beam ■ Sensors can be mounted side-by-side ■ High repeat accuracy 	<ul style="list-style-type: none"> ■ Special L-type ■ Narrow, virtually parallel light beam ■ Sensors can be mounted side-by-side
type	U profile	U profile	U profile	L profile
fork widths	20 mm 30 mm 50 mm 80 mm 120 mm 170 mm	30 mm 50 mm 80 mm 120 mm	30 mm 50 mm 80 mm 120 mm	60 mm 100 mm 158 mm
object size	> 0,4 mm	> 0,1 mm	> 0,05 mm	> 0,5 mm
repeat accuracy	< 0,02 mm	< 0,02 mm	< 0,01 mm	< 0,06 mm
response / release time	< 0,125 ms	< 0,166 ms	< 0,166 ms	< 0,125 ms
connection types	connector M8	connector M8	connector M8	connector M8
housing material	die-cast zinc	aluminum	aluminum	die-cast zinc
operating temperature	-10 ... +60 °C	+5 ... +45 °C	+5 ... +45 °C	-10 ... +60 °C
protection class	IP 67	IP 67	IP 67	IP 67
specific features		■ laser class 1	■ laser class 1	

Learn more:
www.baumer.com/fork-angle

Light barriers and light sensors

Differential, contrast and color sensors

- Fast print mark detection
- Small sizes from 10 mm
- Reliable detection of very low contrasts or very fine color nuances
- Monitoring of position tolerances using differential sensors



	OBDM 12	OZDK 10	OZDM 16
features	<ul style="list-style-type: none"> ■ Difference sensors 	<ul style="list-style-type: none"> ■ Diffuse sensors with intensity difference - miniature 	<ul style="list-style-type: none"> ■ Diffuse sensors with intensity difference with analog output - standard
dimensions (B × H × T)	12,4 × 37 × 34,5 mm	10,4 × 27 × 16,3 mm	15,4 × 50 × 50 mm
light source	laser	laser	laser
sensing distance Tw	16 ... 120 mm	3 ... 150 mm	0 ... 250 mm
response time	< 1 ms	< 0,05 ms	< 0,1 ms
output	PNP NPN	PNP NPN	PNP 4 ... 20 mA
connection types	connector M8	cable 2 m connector M8	cable 2 m connector M8
housing material	die-cast zinc	plastic	die-cast zinc
operating temperature	0 ... +50 °C	0 ... +50 °C	-10 ... +50 °C
protection class	IP 67	IP 67	IP 67
function	<ul style="list-style-type: none"> ■ monitoring of position tolerances ■ object detection on fluctuating conveyor belts ■ detection of minimum and maximum deviations in the process ■ variant for step / edge detection 	<ul style="list-style-type: none"> ■ detection of gradual changes, e. g. when polishing surfaces ■ fast and economical print mark recognition 	<ul style="list-style-type: none"> ■ detection of gradual changes, e. g. when polishing surfaces ■ fast and economical print mark recognition

Learn more:
www.baumer.com/contrast



FKDK 14	FKDR 14	FKDH 14	FKDM 22
<ul style="list-style-type: none"> White LED diffuse contrast sensors 	<ul style="list-style-type: none"> White LED diffuse contrast sensors Washdown design 	<ul style="list-style-type: none"> White LED diffuse contrast sensors Hygienic design 	<ul style="list-style-type: none"> Color sensors
14,8 × 43 × 31 mm	19,6 × 51 × 34,3 mm	19,6 × 52,2 × 34,3 mm	22,9 × 50 × 68,7 mm
white LED	white LED	white LED	RGB
12,5 mm ±2 mm	12,5 mm ±2 mm	12,5 mm ±2 mm	25 mm / 40 mm
< 0,05 ms	< 0,05 ms	< 0,05 ms	< 0,34 ms
push-pull	push-pull	push-pull	PNP NPN
cable 2 m connector M8 connector M12	connector M12	cable 2 m flylead connector M12	connector M12
plastic	stainless steel	stainless steel	aluminum
-25 ... +65 °C	-25 ... +65 °C	-25 ... +60 °C	-10 ... +55 °C
IP 67	IP 68 / IP 69K <i>proTect+</i>	IP 68 / IP 69K <i>proTect+</i>	IP 67
<ul style="list-style-type: none"> detection of gradual changes, e. g. when polishing surfaces fast and economical print mark recognition 	<ul style="list-style-type: none"> detection of gradual changes, e. g. when polishing surfaces fast and economical print mark recognition 	<ul style="list-style-type: none"> detection of gradual changes, e. g. when polishing surfaces fast and economical print mark recognition 	<ul style="list-style-type: none"> 4 color channels Adjustable color tolerance Quick response time of 0,34 ms

Fiber optic sensors

Plastic fiber optic sensors and fiber optic cables

Always close to the action – detecting tiny objects in cramped or inaccessible places

- Large selection of sensing heads with plastic and glass fiber optic cables
- Very small and light sensors for tasks in robotics
- Detection of filling levels or leaks, also in aggressive liquids
- Large sensing range of up to 4 m



	Plastic fiber optic	FVDK 10 (FVDK 10N51/ FVDK 10P51)	FVDK 66 (FVDK 10N66/ FVDK 10P66)
features	<ul style="list-style-type: none"> ■ Extremely varied beam geometries: spot, coaxial, focused, line ■ Fiber optics resistant to chemicals ■ High temperature fiber ■ Lateral beam emission 	<ul style="list-style-type: none"> ■ Smallest fiber optic sensor ■ Sensitivity adjustable with potentiometer 	<ul style="list-style-type: none"> ■ Sensitivity adjustable with Teach-in ■ Minimized installation effort (master slave) ■ Logical output linking available (Duplex version) ■ Timer functions
dimensions		10,4 × 27 × 19,5 mm	10 × 33,8 × 70,2 mm
ranges (optical fiber dependent)			
with through beam (max.)		600 mm	1500 mm
with reflective (max.)		70 mm	130 mm
response time		< 1 ms	0,25 ... 1 ms
output		NPN PNP	NPN PNP
connection types		cable 2 m flylead connector M8	cable 2 m connector M8
housing material		plastic (ASA)	polycarbonate / ABS
operating temperature		-25 ... +55 °C	-20 ... +55 °C
protection class		IP 40	IP 40
additional functions			<ul style="list-style-type: none"> ■ Alarm output ■ External Teach-in
specific features			<ul style="list-style-type: none"> ■ master slave


Learn more:
www.baumer.com/fibre-optic

Fiber optic sensors

Glass fiber optic sensors and fiber optic cables

Always close to the action – detecting tiny objects in cramped or inaccessible places

- Large selection of sensing heads with plastic and glass fiber optic cables
- Very small and light sensors for tasks in robotics
- Detection of filling levels or leaks, also in aggressive liquids
- Large sensing range of up to 4 m



	Glass fiber optic	FZAM 18	FZAM 30	FVDM 15
features	<ul style="list-style-type: none"> ■ Different beam geometries: spot, line ■ Fiber optics with robust metal sheath ■ High temperature fiber ■ Lateral beam emission 	<ul style="list-style-type: none"> ■ Sensitivity adjustable with Teach-in or potentiometer ■ Robust metal housing 	<ul style="list-style-type: none"> ■ Sensitivity adjustable with Teach-in or potentiometer ■ Robust metal housing ■ For large ranges 	<ul style="list-style-type: none"> ■ Sensitivity adjustable with potentiometer ■ Robust metal housing ■ Quick response and release times
dimensions		M18 × 50 mm	M30 × 50 mm	15 × 60 × 45 mm
ranges (optical fiber dependent)				
with through beam (max.)		800 mm	1400 mm	500 mm
with reflective (max.)		150 mm	230 mm	240 mm
response time		< 0,5 ms / < 1 ms	< 0,25 ms / < 2,5 ms	< 0,1 ms / < 1 ms
output		NPN PNP	NPN PNP	NPN PNP
connection types		cable 2 m connector M12	cable 2 m	cable 2 m connector M12
housing material		brass nickel plated / PC	brass nickel plated	die-cast aluminum
operating temperature		-25 ... +55 °C	0 ... +65 °C	-25 ... +55 °C
protection class		IP 67	IP 65	IP 65
specific features		■ infrared	■ fast version ■ infrared	■ fast version ■ infrared

Learn more:
www.baumer.com/fibre-optic

Ultrasonic sensors

Miniaturized ultrasonic sensors

Small and light sensors for very cramped spaces

- Wide range of round and rectangular designs
- Sensing distances up to 400 mm
- Narrow sonic beam for object detection even in the smallest openings
- Lightweight with only 4 grams for gripper applications



	UNAM 12 URAM 12	UNCK / UNDK 09 URCK / URDK 09	UNDK 10 / URDK 10
features	<ul style="list-style-type: none"> ■ Narrow and wide sonic beam angles ■ Highspeed versions ■ Versions with beam columnator 	<ul style="list-style-type: none"> ■ Versions with beam columnator ■ Very flat housing ■ Lateral approach accuracy <1, 5 mm 	<ul style="list-style-type: none"> ■ The world's smallest sensor ■ Weights only 4 grams ■ Narrow sonic beam angles
dimensions	M12	8,6 × 82 × 24,5 mm	10,4 × 27 × 14 mm
sensing range Sd / sensor principle			
proximity switch (UNxx / xx.PAO)	5 ... 400 mm	3 ... 200 mm	10 ... 200 mm
2 point proximity switch (UZxx)			
retro-reflective sensors (URxx / xx.RAO)	0 ... 70 mm	0 ... 200 mm	0 ... 200 mm
through beam sensors (UExx)			
response time	< 1,5 mm	< 0,5 mm < 1,5 mm	< 0,5 mm < 1,5 mm
output	NPN PNP	push-pull NPN PNP	NPN PNP
connection types	connector M12	cable 2 m connector M8	cable 2 m connector M8
housing material	brass nickel plated	plastic	plastic
operating temperature	-10 ... +60 °C	0 ... +60 °C	-10 ... +60 °C
protection class	IP 67	IP 67	IP 67

UNxx / xx.PAO = proximity switch
 URxx / xx.RAO = retro-reflective sensors
 UZxx = 2 point proximity switch
 UExx = through beam sensors

Robust ultrasonic sensors with flexible parameterization

Extremely robust – U500 and UR18

- Highest process reliability due to hermetically sealed sensor element
- IO-Link functionality for flexible parameterization
- Short blind range of 70 mm with a sensing distance up to 1000 mm
- Superb quality with an affordable price tag



Learn more:
www.baumer.com/ultrasonic



IO-Link

UR18



IO-Link

U500

	UR18	U500
features	<ul style="list-style-type: none"> ■ Sensor element hermetical sealed ■ Ideal for level application ■ Very small blind range 	<ul style="list-style-type: none"> ■ Proven slim design ■ Sensor element hermetical sealed ■ Very small blind range
dimensions	M18	15 × 45,1 × 32,2 mm
sensing range Sd / sensor principle		
proximity switch (Uxxx / xx.PAO)	70 ... 1000 mm	70 ... 1000 mm
2 point proximity switch (Uxxx)	70 ... 1000 mm	70 ... 1000 mm
retro-reflective sensors (Uxxx / xx.RAO)	0 ... 1000 mm	0 ... 1000 mm
through beam sensors (Uxxx)	0 ... 2000 mm	0 ... 2000 mm
response time	< 0,5 mm	< 0,5 mm
output	1 × push-pull 2 × push-pull	1 × push-pull 2 × push-pull
adjustable parameters	Switching points or switching windows for distance or counter, measuring range, sound beam, averaging, temperature compensation, output logic, switching hysteresis, input/ output logic, switch-off delay, output circuit, SSC / output assignment, LED behavior, teaching facilities	
process data	MDC: Distance, counter SSC: Distance, counter	
diagnostic data	Switching cycles, operating time, boot cycles, histograms of process data values and the operating voltage and device temperature	
connection types	connector M12, 5 pin	connector M12, 5 pin
housing material	stainless steel V2A	plastic ASA
operating temperature	-25 ... +65 °C	-25 ... +65 °C
protection class	IP 67	IP 67

Ultrasonic sensors

Ultrasonic sensors with Teach button

Undisturbed by difficult environmental conditions and varying object properties

- Cylindrical versions in M18 or M30 housings with connector or cable output
- Extremely compact, flat housing designs
- With teach-in or potentiometer
- Sensing distances up to 2000 mm



	UNAM 18	UNAM 30 UZAM 30	UNDK 20 URDK 20 UEDK 20
features	<ul style="list-style-type: none"> ■ Standardised installation due to M18 housing ■ Internal and external Teach-in ■ Cable and connector versions 	<ul style="list-style-type: none"> ■ Internal and external Teach-in ■ Cable and connector versions ■ Potentiometer versions 	<ul style="list-style-type: none"> ■ Flat type ■ Internal and external Teach-in ■ Narrow and wide sonic beam angles ■ M8 connector
dimensions	M18	M30	20 × 42 × 15 mm
sensing range Sd / sensor principle			
proximity switch (UNxx / xx.PAO)	100 ... 1000 mm	200 ... 1500 mm	10 ... 1000 mm
2 point proximity switch (UZxx)		100 ... 1000 mm	
retro-reflective sensors (URxx / xx.RAO)			0 ... 1000 mm
through beam sensors (UExx)			0 ... 1000 mm
response time	< 0,5 mm	< 0,5 mm	< 0,5 mm
output	NPN PNP	NPN PNP	NPN PNP
connection types	cable 2 m connector M12	cable 2 m connector M12	connector M8
housing material	brass nickel plated stainless steel	brass nickel plated	plastic
operating temperature	-10 ... +60 °C	-25 ... +60 °C -10 ... +60 °C	-10 ... +60 °C
protection class	IP 67	IP 67	IP 67

UNxx / xx.PAO = proximity switch
 URxx / xx.RAO = retro-reflective sensors
 UZxx = 2 point proximity switch
 UExx = through beam sensors

Learn more:
www.baumer.com/ultrasonic



UNDK 30 / URDK 30
UZDK 30 / UEDK 30

- Compact type
- Large sensing range
- Teach-in on the sensor
- Potentiometer version
- Narrow and wide sonic beam angles

30 × 65 × 31 mm

30 ... 1000 mm

30 ... 2000 mm

0 ... 2000 mm

0 ... 700 mm

< 0,5 mm

NPN
PNP

cable 2 m
connector M12

plastic / die-cast zinc

-10 ... +60 °C

IP 67

Ultrasonic sensors

Application-specific ultrasonic sensors - High-speed / Chemically robust

- High-speed sensors
- Chemical robust stainless steel sensors with patented parylene coating



	UNAM 12 High-speed	URAM 12 High-speed	UNAR 12 URAR 12	UNAR 18 URAR 18
category	High-speed sensors		Chemically robust stainless steel sensors with parylene coating	
features	<ul style="list-style-type: none"> ■ Fastest ultrasonic sensor ■ External Teach-in 	<ul style="list-style-type: none"> ■ Fastest ultrasonic sensor ■ External Teach-in ■ Sensors with sonic nozzle for small openings 	<ul style="list-style-type: none"> ■ Miniature sensor for narrow designs ■ Patented all-round protection ■ FDA-compliant materials ■ Very short response time 	<ul style="list-style-type: none"> ■ M18 standard housing ■ FDA-compliant materials ■ Internal and external Teach-in
dimensions	M12	M12	M12	M18
sensing range Sd / sensor principle				
proximity switch (UNxx / xx.PAO)	0 ... 40 mm 10 ... 70 mm		30 ... 200 mm	60 ... 1000 mm
2 point proximity switch (UZxx)				
retro-reflective sensors (URxx / xx.RAO)		0 ... 40 mm 0 ... 70 mm	0 ... 200 mm	0 ... 400 mm
repeat accuracy	< 0,5 mm	< 1,5 mm	< 0,5 mm	< 0,5 mm
output	NPN PNP	NPN PNP	NPN PNP	NPN PNP
connection types	connector M12	connector M12	connector M12	connector M12
housing material	brass nickel plated	brass nickel plated	stainless steel	brass nickel plated stainless steel
operating temperature	-10 ... +60 °C	-10 ... +60 °C	0 ... +60 °C	-10 ... +60 °C
protection class	IP 67	IP 67	IP 67	IP 67

UNxx / xx.PAO = proximity switch
 URxx / xx.RAO = retro-reflective sensors
 UZxx = 2 point proximity switch
 UExx = through beam sensors

Application-specific ultrasonic sensors - Sonic nozzles / Sensing distances

- Sensors with sonic nozzles
- Sensors with large sensing distances



Learn more:
www.baumer.com/ultrasonic



	UNDK 09	UNAM / URAM 12	UNAM 50 URAM 50 UZAM 50	UZAM 70
category	with sonic nozzles		with large sensing distances	
features	<ul style="list-style-type: none"> ■ High resolution ■ Minimal blind region ■ RS 232 ■ Various mounting options ■ Flat housing ■ Narrow sonic beam angle for detection in openings of up to 3 mm 	<ul style="list-style-type: none"> ■ Sonic nozzle for very narrow sonic beams ■ External Teach-in ■ Connector M12 	<ul style="list-style-type: none"> ■ Internal and external Teach-in ■ Cable and connector versions ■ Potentiometer versions 	<ul style="list-style-type: none"> ■ Internal and external Teach-in ■ Connector M12
dimensions	8,6 × 82 × 24,5 mm	M12	M30	M30
sensing range Sd / sensor principle				
proximity switch (UNxx / xx.PAO)	3 ... 200 mm	5 ... 400 mm	350 ... 2500 mm	
2 point proximity switch (UZxx)			350 ... 2500 mm	60 ... 600 mm
retro-reflective sensors (URxx / xx.RAO)	0 ... 200 mm	0 ... 70 mm	0 ... 3000 mm	
response time	< 0,5 mm	< 0,5 mm	< 1 mm < 3 mm	< 3 mm
output	push-pull RS 232	NPN PNP	NPN PNP	NPN PNP
connection types	cable 2 m flylead connector M8	connector M12	cable 2 m connector M12	connector M12
housing material	plastic	brass nickel plated	brass nickel plated	brass nickel plated
operating temperature	0 ... +60 °C	-10 ... +60 °C	-25 ... +60 °C	-25 ... +60 °C
protection class	IP 67	IP 67	IP 67	IP 67

Magnetic and cylinder sensors

Magnetic proximity sensors

- Reliable and wear-free object detection
- Large sensing distances up to 60 mm
- Cylindrical and rectangular versions



	MFFM 08	MFRM 08	MFVM 08
features	<ul style="list-style-type: none"> ■ Acquisition of magnet location ■ Large sensing range ■ Object detection through container walls possible 	<ul style="list-style-type: none"> ■ Acquisition of magnet location ■ Large sensing range ■ Object detection through container walls possible 	<ul style="list-style-type: none"> ■ Full metall sensor ■ Sensing distance to 60 mm
dimensions	8 × 30 × 8 mm	M8	8 × 12 × 30 mm
assured sensing distance Sa max.	to 60 mm	2,5 mT	2,5 mT
switching frequency	5 kHz	5 kHz	5 kHz
voltage supply range +Vs	10 ... 30 VDC	10 ... 30 VDC	10 ... 30 VDC
output circuit	PNP NPN	PNP NPN	PNP NPN
connection types	cable 2 m	cable 2 m	cable 2 m
housing material	brass nickel plated	stainless steel	aluminum
operating temperature	-25 ... +75 °C	-25 ... +75 °C	-25 ... +75 °C
protection class	IP 67	IP 67	IP 67

Cylinder sensors

- Detecting stop positions of pistons in every standard cylinder with C- or T-slots
- Different versions and versatile installation accessories for maximum flexibility
- Non-contact sensing and absolutely wear-free



Learn more:
www.baumer.com/magnetic



	MZCK 03x1011 MZCK 03x1012	MZTK 06x1011 MZTK 06x1012 MZTK 06x1013
features	<ul style="list-style-type: none"> ■ For C slot cylinders ■ Oil- and salt water climate resistant 	<ul style="list-style-type: none"> ■ For T slot cylinders ■ Oil- and salt water climate resistant
dimensions	3,7 × 23 × 4,6 mm 3,7 × 11 × 19,5 mm	6,2 × 31 × 4,3 mm 6,5 × 21 × 9,4 mm 6,2 × 31,5 × 4,5 mm
nominal operation point / assured sensing distance Sa max.	4 mT	4 mT 2 mT (MZTK 06x1012)
switching frequency	200 kHz	200 kHz
voltage supply range +Vs	6 ... 30 VDC	6 ... 30 VDC
output circuit	PNP NPN	PNP NPN
connection types	cable 2,5 m flylead connector M8	cable 2,5 m flylead connector M8
housing material	PA 66	PA 66
operating temperature	-40 ... +70 °C	-40 ... +70 °C
protection class	IP 67	IP 67

Hall and magnetic rotary sensors

Hall and magnetic rotary sensors

- Detection of speed and rotation direction at gear wheels
- Absolute acquisition of part location up to 360° rotary angle
- Wear-free and thus extremely low-maintenance
- Particular robust variants available
- High resolution



	MHRM 12 / 18	MTRM 16 / MTR
function	hall sensors	hall sensors
features	<ul style="list-style-type: none"> ■ Detects gears and racks ■ Sealed metal housing ■ Operating temperature range -40 ... +120 °C 	<ul style="list-style-type: none"> ■ Detection of rpm speed and rotational direction of gear wheels ■ Completely sealed metal housing ■ Operating temperature range -40 ... +120 °C
dimensions	M12 × 1 M18 × 1	ø 16 mm
working distance max.	2 mm	2,5 mm
switching frequency / response time	20 kHz	20 kHz
resolution	starting from module 1	module 1 to 3
output	push-pull	push-pull
connection types	cable 2 m connector M12	cable 2 m
housing material	brass nickel plated stainless steel	brass nickel plated stainless steel 1.4404
operating temperature	-40 ... +120 °C	-40 ... +120 °C
protection class	IP 67 (sensor) IP 68 (sensing face)	IP 68 / IP 69K
specific features	<ul style="list-style-type: none"> ■ single and dual channel versions 	<ul style="list-style-type: none"> ■ compliant to stringent railway standards: EN 50155 EN 61373 (Kat. 3) EN 45545

Learn more:
www.baumer.com/hall



	MDRM 18 MDFM 20
function	magnetic angle sensors
features	<ul style="list-style-type: none"> ■ Can be used as an electronic potentiometer ■ Absolute position feedback to 360° of rotation ■ Cylindrical and rectangular designs
dimensions	M18 × 1 20 × 30 × 8 mm
working distance max.	2 mm
switching frequency / response time	4 ms
resolution	0,09°
output	analog current or voltage output
connection types	cable 2 m connector M12 flylead connector M8
housing material	brass nickel plated
operating temperature	-40 ... +85 °C
protection class	IP 67
specific features	<ul style="list-style-type: none"> ■ suitable magnets available as an accessory

Edge measurement and detection

Edge measurement and detection

Our experts for precise object edge positions

- Web edge measurement independent of radial runout, color or surface
- Edge detection with wide measuring field
- Edge measurement even of transparent objects with large measuring range up to 1400 mm
- Lap stream copy counting



	<i>PosCon OXE7</i>	ZADM 023	ZADM 023	<i>ParCon ZADM 034</i>
category	web edge measurement independent of radial or axial runout	edge detection with wide measuring field	edge detection with wide measuring field	measurements of edge positions and object widths
features	<ul style="list-style-type: none"> ■ Distance-independent measurement without reflector ■ Configurable measuring field ■ Flexible mounting of $\pm 30^\circ$ 	<ul style="list-style-type: none"> ■ Control of textile, plastic or paper edges ■ Capable of detecting transparent objects and foils 	<ul style="list-style-type: none"> ■ Control of textile, plastic or paper edges ■ Extremely large measuring field up to 875 mm in width ■ Capable of detecting transparent objects and foils 	<ul style="list-style-type: none"> ■ Measuring mode: edges, width ■ Broad and parallel light beam ■ High measuring frequency
dimensions	26 × 74 × 55 mm	23 × 50 × 50 mm	23 × 50 × 50 mm	34 × 67 × 16,5 mm
sensor principle	Light-section sensor	Line sensor	Line sensor	Line sensor
light source		pulsed infrared diode		
measuring range Sd	100 ... 150 mm 150 ... 250 mm	50 mm 200 mm 500 mm	60 ... 1400 mm	0 ... 40 mm
measuring field size		30 mm 150 mm 350 mm	400 ... 875 mm	24 mm
resolution	20 μ m 30 ... 50 μ m	< 0,15 mm	< 2 ms	< 0,05 mm
output circuit	analog and RS 485	PNP NPN	RS 485 PNP NPN	analog
output signal		4 ... 20 mA	4 ... 20 mA	4 ... 20 mA
measuring frequency		> 500 Hz	> 500 Hz	> 1600 Hz
connection types	connector M12 8 pin	connector M12 8 pin rotatable	connector M12 8 pin rotatable	connector M8 4 pin
housing material	aluminum	die-cast zinc	die-cast zinc	aluminum
operating temperature	-25 ... +75 °C	0 ... +55 °C	0 ... +55 °C	0 ... +55 °C
protection class	IP 67	IP 67	IP 67	IP 67

Learn more:
www.baumer.com/opto



ParCon ZADM 034

ParCon ZADM 034

measurements of edge positions and object widths

- Measuring mode: edges, width, sum of all dark areas
- Broad and parallel light beam
- High measuring frequency

34 × 67 × 16,5 mm

Line sensor

0 ... 200 mm

22 mm

< 0,1 mm (S = 0 ... 150 mm)
 < 0,2 mm (S = 150 ... 200 mm)

analog

4 ... 20 mA

> 1100 Hz

connector M8 4 pin

aluminum

0 ... +55 °C

IP 67

measurements of edge positions and object widths

- Switching version
- Detection of small objects
- Measuring range up to 24 × 40 mm

34 × 67 × 16,5 mm

Line sensor

0 ... 40 mm

24 mm

< 0,1 mm

PNP

4 ... 20 mA

> 4000 Hz

connector M8 4 pin

aluminum

0 ... +55 °C

IP 67

Edge measurement and detection

Edge measurement and detection

Our experts for precise object edge positions

- Web edge measurement independent of radial runout, color or surface
- Edge detection with wide measuring field
- Edge measurement even of transparent objects with large measuring range up to 1400 mm
- Lap stream copy counting



	<i>SCATEC-J</i>	<i>SCATEC-2</i>	<i>SCATEC-10</i>	<i>SCATEC-15</i>
category	entry-level model edge thickness up 1,5 mm	standard edge thickness up 0,2 mm	precision class edge thickness up 0,1 mm	precision class edge thickness up 0,15 mm
dimensions	33 × 110 × 50 mm	33 × 110 × 50 mm	30 × 170 × 70 mm	30 × 170 × 70 mm
measuring distance	0 ... 55 mm	0 ... 120 mm	0 ... 90 mm	0 ... 120 mm
sensitivity	single sheet/edge thickness 1,5 mm	single sheet/edge thickness 0,2 mm	single sheet/edge thickness 0,1 mm	single sheet/edge thickness 0,15 mm
counting rate	280'000 copies/h	600'000 copies/h	3'000'000 copies/h	3'000'000 copies/h
false pulse suppression		on/off switchable	4 program options	4 program options
connection types	connector M12	connector M12	DIN 45322 (main connector) DIN 45326 (interface)	DIN 45322 (main connector) DIN 45326 (interface)
housing material	PA 6	PA 6	die-cast zinc	die-cast zinc
operating temperature	0 ... +50 °C	0 ... +50 °C	0 ... +50 °C	0 ... +50 °C
protection class	IP 54	IP 54	IP 54	IP 54
specific features		<ul style="list-style-type: none"> ■ SCATEC-2 Box for counting of individual packages (in transport clamps) ■ Counting of double copies 		

Learn more:
www.baumer.com/opto

Precision mechanical switches

Precision mechanical switches *MY-COM*[®]

Micrometer precision – 70 times more accurate than a hair is thick

- Repeat accuracy of 1 micrometer – the most accurate mechanical limit switch in the world
- Compact design for very confined installation environment
- Mechanical (NC) and electrical (NO) output circuit



	MY-COM A	MY-COM B	MY-COM C	MY-COM D
features	<ul style="list-style-type: none"> ■ Conical housing front ■ M8 fine pitch thread 	<ul style="list-style-type: none"> ■ Brass housing ■ Flat housing front ■ M8 fine pitch thread 	<ul style="list-style-type: none"> ■ Flat brass housing ■ 2-hole mounting 	<ul style="list-style-type: none"> ■ Robust burnished brass housing ■ Spherical metal tip ■ Protection class IP 67 ■ Lateral approach possible to 30°
all mechanical	■	■	■	
with amplifier				
for lateral approach				■
rugged IP 67				■
dimensions	M8 × 0,5	M8 × 0,5	8 × 12 × 30 mm	M16 × 0,5
repeat accuracy	< 1 μm	< 1 μm	< 1 μm	< 1 μm
output	NC (mechanical)	NC (mechanical)	NC (mechanical)	NC (mechanical) NO (PNP/NPN)
connection types	cable 0,8 m connector M8	cable 0,8 m connector S30	cable 0,8 m connector M8	cable 0,8 m connector M8
activating pin	zirconium oxide ZrO2	zirconium oxide ZrO2	zirconium oxide ZrO2	hardened steel
housing material	brass nickel plated	brass nickel plated	brass nickel plated	burnished brass
operating temperature	-20 ... +75 °C	-20 ... +75 °C	-20 ... +75 °C	-20 ... +75 °C
protection class	IP 50	IP 50	IP 50	IP 67

Learn more:
www.baumer.com/my-com



MY-COM E	MY-COM F MY-COM G	MY-COM H MY-COM L	MY-COM M
<ul style="list-style-type: none"> ■ Brass housing ■ M6 fine pitch thread ■ Spherical hard metal tip ■ Lateral approach possible to 30° 	<ul style="list-style-type: none"> ■ Brass housing ■ Long M8 fine pitch thread 	<ul style="list-style-type: none"> ■ Brass housing ■ M8 fine pitch thread ■ Spherical ruby tip ■ Protection class IP 67 	<ul style="list-style-type: none"> ■ Brass housing ■ M8 fine pitch thread ■ Protection class IP 67
■	■	H	■
	G	L	■
■			
		■	■
M6 × 0,5	M8 × 0,5	M8 × 0,5	M8 × 0,5
< 1 µm	< 1 µm	< 1 µm	< 1 µm
NC (mechanical) NO (PNP/NPN)	NC (mechanical) NO (PNP/NPN)	NC (mechanical) NO (PNP/NPN)	NC (mechanical) NO (PNP/NPN)
cable 0,8 m	cable 0,8 m connector M8	cable 0,8 m connector M8	cable 0,8 m connector M8
hardened steel	zirconium oxide ZrO2	ruby	zirconium oxide ZrO2
brass nickel plated	brass nickel plated	brass nickel plated	brass nickel plated
-20 ... +75 °C	-20 ... +75 °C	-20 ... +75 °C	-20 ... +75 °C
IP 50	IP 50	IP 67	IP 67

Distance measurement

Sensors for detecting distances and distance information from the μm range to over 40 m.



Content.

Optical distance sensors

Minature sensors	68
High performance sensors	69
Sensors for long measuring range and standard sensors	70
Sensors in hygienic and washdown design	72
Radar sensors	74

Ultrasonic distance sensors

Minature sensors	76
Robust distance sensors with flexible parameterization	77
Ultrasonic sensors with Teach button	78
Chemically robust sensors / for off-highway machinery	80
With sonic nozzles / long ranges	81

Inductive distance sensors – AlphaProx®

Cylindrical housings	82
Rectangular housings	84
Linearized characteristic curve	86
Sensors with reduction factor 1	87
High-precision and high-sensitivity sensors	88
Robust sensors / Designed for Reliability	89
Sensors with IO-Link interface	90

Linear magnetic encoders

Dimension 10 mm	92
-----------------	----

Measuring wheel encoders

Measuring wheels	94
Incremental encoders	95
Handheld programming tool	95

Cable transducers

Cable transducers	96
-------------------	----

Photoelectric sensors

Optical distance sensors

Precise distance, spacing and position measurements even on challenging surfaces

- Fast, accuracy in the submicrometer range and distances of up to 13 meters
- Reliably even on very rough, shiny or dark surfaces
- Very high ambient light immunity
- Large selection of performance classes, sizes and beam shapes



	OADM 12	OADM 13	OADM 20	OADM 20	OADR 20
category	miniature sensors		performance sensors		
features	<ul style="list-style-type: none"> ■ Smallest laser distance sensor ■ Adjustable measuring range ■ Highest resolution ■ Also as laser class 1 	<ul style="list-style-type: none"> ■ Large measuring distance in a small housing ■ Adjustable measuring range ■ Also as laser class 1 & 2 ■ Point and Line 	<ul style="list-style-type: none"> ■ The allrounder ■ High vibration resistance ■ Different measuring ranges teachable ■ High measuring rates 	<ul style="list-style-type: none"> ■ Increased vibration immunity ■ Increased ambient light immunity 100K lux ■ Suitable for outdoor applications 	<ul style="list-style-type: none"> ■ Washdown design ■ Adjustable measuring range ■ Laser Point / Laser line
dimensions	12,4 × 37 × 34,5 mm	13,4 × 48,2 × 40 mm	20,6 × 65 × 50 mm	20,6 × 65 × 50 mm	20,3 × 65 × 50 mm
measuring distance	16 ... 120 mm	50 ... 550 mm	30 ... 1000 mm	50 ... 1000 mm	30 ... 600 mm
resolution	2 µm	10 µm	4 µm	10 µm	5 µm
response time	< 0,9 ms	< 0,9 ms	< 0,9 ms	< 2,5 ms	< 0,9 ms
output	4 ... 20 mA 0 ... 10 V	4 ... 20 mA 0 ... 10 V RS 485 / RS 232	4 ... 20 mA 0 ... 10 V RS 485	4 ... 20 mA 0 ... 10 V	4 ... 20 mA 0 ... 10 V
connection types	connector M8	connector M8	connector M12	connector 2 m	connector M12
housing material	die-cast zinc	aluminum	die-cast zinc	die-cast zinc	stainless steel 1.4404 (V4A)
operating temperature	0 ... +50 °C	0 ... +50 °C	0 ... +50 °C	0 ... +50 °C	0 ... +50 °C
protection class	IP 67	IP 67	IP 67	IP 67	IP 68 / IP 69K & proTect+
specific features	<ul style="list-style-type: none"> ■ suppression of incorrect measuring operations, the last measured value is retained at the output for up to 30 ms 	<ul style="list-style-type: none"> ■ suppression of incorrect measuring operations, the last measured value is retained at the output for up to 30 ms 	<ul style="list-style-type: none"> ■ alarm output to signalize any incorrect measuring operation or out-of-range object ■ input for synchronizing measurements ■ laser diode can be switched on/off 	<ul style="list-style-type: none"> ■ missing measurement signals or incorrect measurements are suppressed 	<ul style="list-style-type: none"> ■ alarm output to signalize any incorrect measuring operation or out-of-range object ■ input for synchronizing measurements ■ laser diode can be switched on/off

Learn more:
www.baumer.com/opto-distance



OADM 21

OM 70
 Very high measuring accuracy

OM 70
 Large measuring distances

OM 70
 Tolerance measurement

OM 70
 multi-spot

high performance sensors

- High resolution at large measuring distance
- Adjustable measuring range

- Selectable focus ranges
- Resolutions up to 0,7 µm
- Maximum measuring distances up to 250 mm
- Linearity deviations ±0,06 %

- Selectable focus ranges
- Resolutions up to 1,4 µm
- Maximum measuring distances up to 1500 mm
- Ideal for very dark objects

- Selectable focus ranges
- Resolutions up to 0,7 µm
- Maximum measuring distances up to 250 mm
- Linearity deviations ±0,06 %

- Up to 600 measured values along a max. 72 mm long laser for stable measurements
- Versions with Ethernet interface, OPC UA and Modbus TCP

20,4 × 135 × 45 mm

26 × 74 × 55 mm

26 × 74 × 55 mm

26 × 74 × 55 mm

26 × 74 × 55 mm

100 ... 1000 mm

30 ... 250 mm

100 ... 1500 mm

30 ... 250 mm

100 ... 1500 mm

10 µm

0,7 µm

1,4 µm

0,7 µm

2 µm

< 5 ms

< 0,8 ms

< 0,8 ms

< 6 ms

< 3,5 ms

4 ... 20 mA
 0 ... 10 V

4 ... 20 mA
 0 ... 10 V
 RS 485

4 ... 20 mA
 0 ... 10 V
 RS 485

4 ... 20 mA
 0 ... 10 V
 RS 485

4 ... 20 mA
 0 ... 10 V
 RS 485
 Ethernet TCP/IP

connector M12

connector M12

connector M12

connector M12

connector M12

aluminum

aluminum

aluminum

aluminum

aluminum

0 ... +50 °C

-10 ... +50 °C

-10 ... +50 °C

-10 ... +50 °C

-10 ... +50 °C

IP 67

IP 67

IP 67

IP 67

IP 67

- alarm output to signalize any incorrect measuring operation or out-of-range object
- input for synchronizing measurements
- laser diode can be switched on/off

- selectable filtering
- configurable, digital switching output with adjustable hysteresis in millimeters
- various trigger modes, touch display
- changeover between current or voltage output 3 memory slots for parameter settings

- selectable filtering
- configurable, digital switching output with adjustable hysteresis in millimeters
- various trigger modes, touch display
- changeover between current or voltage output 3 memory slots for parameter settings

- selectable filtering
- configurable, digital switching output with adjustable hysteresis in millimeters
- various trigger modes, touch display
- changeover between current or voltage output 3 memory slots for parameter settings

- Modbus TCP, OPC UA
- selectable filtering
- Configurable, digital switching output with adjustable hysteresis in millimeters
- various trigger modes, touch display
- changeover between current or voltage output 3 memory slots for parameter settings

Photoelectric sensors

Standard distance sensors

- Resolution up to 0.1 mm
- Measuring range up to 1000 mm
- Red LED or laser class 1
- Washdown and hygienic design
- IO-Link



OADM 250

OADM 260

	OADM 250	OADM 260
category	long range sensors	
features	<ul style="list-style-type: none"> ■ High resolution ■ Measurement up to 4 m independent of colors ■ Alarm output ■ Adjustable measuring range 	<ul style="list-style-type: none"> ■ Large measuring range up to 13 m ■ Alarm output ■ Adjustable measuring range
dimensions	25,4 × 66 × 51 mm	25,4 × 66 × 51 mm
measuring distance	0,5 ... 4 m	0,5 ... 13 m
resolution	1,2 mm	5 mm
response time	< 10 ms	< 10 ms
output signal	4 ... 20 mA 0 ... 10 V	4 ... 20 mA 0 ... 10 V
connection types	connector M12	connector M12
housing material	aluminum	aluminum
operating temperature	-25 ... +50 °C	-25 ... +50 °C
protection class	IP 67	IP 67
specific features	<ul style="list-style-type: none"> ■ alarm output to signalize any incorrect measuring operation or out-of-range object 	<ul style="list-style-type: none"> ■ alarm output to signalize any incorrect measuring operation or out-of-range object

Learn more:
www.baumer.com/opto-distance



IO-Link

O300.DI / DP / DL



IO-Link

FADK 14
 LED distanz sensor



IO-Link

O500.DI / DP



OADK 25
 Laser distanz sensor

category	standard sensors			
features	<ul style="list-style-type: none"> Distance measurement value via IO-Link in a miniature housing Switching output PinPoint LED, infrared LED or laser 	<ul style="list-style-type: none"> Compact housing Measuring distance 50 ... 400 mm Resolution up to 0,1 mm 	<ul style="list-style-type: none"> Distance measurement value via IO-Link Switching output Red light, infrared LED 	<ul style="list-style-type: none"> <i>qTeach</i>[®] Alarm output Laser class 1
dimensions	12,9 × 32,3 × 23 mm	14,8 × 43 × 31 mm	18 × 45 × 32 mm	23,4 × 63 × 45 mm
measuring distance	30 ... 300 mm (Infrared, PinPoint) 30 ... 250 mm (Laser)	50 ... 400 mm	60 ... 550 mm	100 ... 1000 mm
resolution	0,5 ... 5 mm (Infrared, PinPoint) 0,5 ... 10 mm (Laser)	0,1 ... 1 mm	0,5 ... 5 mm	0,3 mm
response time	< 0,25 ms	< 3 ms	< 0,49 ms	< 12,8 ms
output signal	push-pull / IO-Link	4 ... 20 mA 0 ... 10 V	push-pull / IO-Link	4 ... 20 mA 0 ... 10 V
connection types	cable 2 m connector M8	cable 2 m connector M12	cable 2 m connector M12	cable 2 m connector M12
housing material	plastic (ASA, PMMA)	plastic (ASA, MABS)	plastic (ASA, PMMA)	plastic (SAN LURAN 378P)
operating temperature	-25 ... +60 °C -10 ... +60 °C (laser)	0 ... +50 °C	-25 ... +60 °C	0 ... +50 °C
protection class	IP 67	IP 67	IP 67	IP 67
specific features	<ul style="list-style-type: none"> cost-effective solution for simpler measuring tasks 	<ul style="list-style-type: none"> cost-effective solution for simpler measuring tasks 	<ul style="list-style-type: none"> cost-effective solution for simpler measuring tasks 	<ul style="list-style-type: none"> cost-effective solution for simpler measuring tasks

Photoelectric sensors

Robust stainless steel distance sensors

Sensors in hygienic and washdown design

- Stainless steel housing V4A
- *proTect+*® sealing concept
- Ecolab-tested and -certified
- EHEDG-compliant
- FDA-compliant materials



IO-Link

FADR 14



IO-Link

FADH 14



OADR 20

	FADR 14	FADH 14	OADR 20
features	<ul style="list-style-type: none"> ■ Washdown design ■ Adjustable measuring range ■ Point source LED 	<ul style="list-style-type: none"> ■ Hygienic design ■ Adjustable measuring range ■ Point source LED 	<ul style="list-style-type: none"> ■ Washdown design ■ Adjustable measuring range ■ Laser beam ■ Laser Point / Laser line ■ Vibration-resistant
dimensions	19,6 × 62,4 × 33,8 mm	19,6 × 99,5 × 33,6 mm	20,3 × 65 × 50 mm
measuring distance	50 ... 400 mm	50 ... 400 mm	30 ... 600 mm
resolution	0,1 mm	0,1 mm	5 µm
response time	< 3 ms	< 3 ms	< 0,9 ms
output signal	4 ... 20 mA 0 ... 10 V	4 ... 20 mA 0 ... 10 V	4 ... 20 mA 0 ... 10 V
connection types	connector M12	cable 2 m flylead connector M12	connector M12
housing material	stainless steel 1.4404 (V4A)	stainless steel 1.4404 (V4A)	stainless steel 1.4404 (V4A)
operating temperature	0 ... +50 °C	0 ... +50 °C	0 ... +50 °C
protection class	IP 68 / IP 69K & <i>proTect+</i>	IP 68 / IP 69K & <i>proTect+</i>	IP 68 / IP 69K & <i>proTect+</i>
specific features	<ul style="list-style-type: none"> ■ alarm output to signalize any incorrect measuring operation or out-of-range object ■ service status indicator when soiled 	<ul style="list-style-type: none"> ■ alarm output to signalize any incorrect measuring operation or out-of-range object ■ service status indicator when soiled 	<ul style="list-style-type: none"> ■ alarm output to signalize any incorrect measuring operation or out-of-range object ■ input for synchronizing measurements ■ laser diode can be switched on/off

Learn more:
www.baumer.com/opto-distance

Radar sensors

Radar distance measuring sensors

Precise measurements in the most extreme environments

- Smallest radar sensor with very narrow beam profile
- Reliable distance measurement up to 40 m even in harsh environments and when covered with dirt
- Available in Europe, USA and Canada



RR30.DA (122 GHz)

for flat or round objects
to 40 m

features

- Parallel analog and switching output
- Narrow opening angle

dimensions

M30 × 107 mm

measuring distance

0,3 ... 40 m

response time

< 1 ms

output

4 ... 20 mA / 20 ... 4 mA +
push-pull
0 ... 10 V / 10 ... 0 V +
push-pull

adjustable parameters

Measuring distance, switching points via *qTeach*

connection types

connector M12 5 pin

housing material

stainless steel

operating temperature

-25 ... +65 °C

protection class

IP 68/IP 69K

Learn more:
www.baumer.com/radar-distance

Ultrasonic sensors

Miniaturized ultrasonic distance sensors

Small and light – for cramped spaces and very small openings

- Smallest and lightest ultrasonic sensor weighing only 4 grams
- Large selection of round and rectangular designs
- Measuring ranges up to 400 mm
- Narrow sonic beam angles for measurement in very small openings



 IO-Link

	UNAM 12	UNDK 09 UNCK 09	UNDK 10
category	miniature	miniature	miniature
features	<ul style="list-style-type: none"> ■ Narrow and wide sonic beam angles ■ External Teach-in ■ M12 connector 	<ul style="list-style-type: none"> ■ High resolution ■ Minimal blind region ■ RS 232 ■ Various mounting options ■ Flat housing ■ Narrow sonic beam angle for detection in openings of up to 3 mm 	<ul style="list-style-type: none"> ■ Smallest ultrasonic sensor ■ Internal and external Teach-in ■ Very low weight: 4 g ■ Narrow sonic beam angle ■ Cable and flylead connector versions
dimensions	M12	8,6 × 48,8 × 57,5 mm	10,4 × 27 × 14 mm
measuring distance	20 ... 400 mm	3 ... 200 mm	20 ... 200 mm
response time	< 10 ms	< 7 ms	< 15 ms
resolution	< 0,5 mm	< 0,1 mm	< 0,3 mm
repeat accuracy	< 0,5 mm	< 0,5 mm	< 0,5 mm
output	0 ... 10 mA / 10 ... 0 mA 0 ... 10 V / 10 ... 0 V	0 ... 10 V / 10 ... 0 V RS 232	0 ... 10 V / 10 ... 0 V
connection types	connector M12	cable 2 m flylead connector M8	cable 2 m connector M8 flylead connector M8
housing material	brass nickel plated	plastic	plastic
operating temperature	-10 ... +60 °C	0 ... +60 °C	-10 ... +60 °C
protection class	IP 67	IP 67	IP 67
specific features	<ul style="list-style-type: none"> ■ with or w/o sonic nozzles 	<ul style="list-style-type: none"> ■ with or w/o sonic nozzles ■ cascable in 9 mm grid 	<ul style="list-style-type: none"> ■ wide range of accessories and installation options

Robust ultrasonic distance sensors with flexible parameterization

Extremely resistant and flexible parameterization for any application

- Highest process reliability due to hermetically sealed sensor element
- IO-Link functionality for flexible parameterization
- Short blind range of 70 mm with a sensing distance up to 1000 mm
- Highest quality with high economic efficiency



Learn more:
www.baumer.com/ultrasonic-distance



IO-Link

UR18



IO-Link

U500

	UR18	U500
features	<ul style="list-style-type: none"> ■ IO-Link interface ■ Robust sensor element ■ Push-pull measurement signal due to IO-Link 	
dimensions	M18	15 × 45,1 × 32,2 mm
measuring distance	70 ... 1000 mm	70 ... 1000 mm
response time	< 40 ms	< 40 ms
resolution	< 0,3 mm	< 0,3 mm
repeat accuracy	< 0,5 mm	< 0,5 mm
output	4 ... 20 mA / 20 ... 4 mA + push-pull 0 ... 10 V / 10 ... 0 V + push-pull	
adjustable parameters	Switching points or switching windows for distance or counter, measuring range, sound beam, averaging, temperature compensation, output logic, switching hysteresis, input/ output logic, switch-off delay, output circuit, SSC / output assignment, LED behavior, teaching facilities	
process data	MDC: Distance, counter SSC: Distance, counter	
diagnostic data	Switching cycles, operating time, boot cycles, histograms of process data values and the operating voltage and device temperature	
connection types	connector M12, 5 pin	connector M12, 5 pin
housing material	stainless steel V2A	plastic ASA
operating temperature	-25 ... +65 °C	-25 ... +65 °C
protection class	IP 67	IP 67

Ultrasonic sensors

Ultrasonic distance sensors with teach button

Unimpressed by difficult environmental conditions and varying object properties

- Cylindrical versions in M18 or M30 housings with connector or cable output
- Extremely compact, flat housing designs
- With teach-in or potentiometer
- Sensing distances up to 2000 mm



	UNAM 18	UNAM 30	UNDK 20	UNDK 30
category	standard	standard	standard	standard
features	<ul style="list-style-type: none"> ■ Internal and external Teach-in ■ M12 connector 	<ul style="list-style-type: none"> ■ Internal and external Teach-in ■ Cable and connector versions ■ Potentiometer versions 	<ul style="list-style-type: none"> ■ Flat type ■ Internal and external Teach-in ■ Narrow and wide sonic beam angles ■ M8 connector 	<ul style="list-style-type: none"> ■ Compact design ■ Large sensing range ■ Internal Teach-in ■ Potentiometer version ■ Narrow and wide sonic beam angles ■ Cable and connector versions
dimensions	M18	M30	20 × 42 × 15 mm	30 × 65 × 31 mm
measuring distance	100 ... 1000 mm	100 ... 1000 mm	20 ... 1000 mm	30 ... 2000 mm
response time	< 10 ms	< 100 ms	< 10 ms	
resolution	< 0,3 mm	< 0,3 mm	< 0,3 mm	< 0,3 mm
response time	< 0,5 mm	< 0,5 mm	< 0,5 mm	< 1 mm
output	4 ... 20 mA / 20 ... 4 mA 0 ... 10 V / 10 ... 0 V	4 ... 20 mA / 20 ... 4 mA 0 ... 10 V / 10 ... 0 V	4 ... 20 mA / 20 ... 4 mA 0 ... 10 V / 10 ... 0 V	4 ... 20 mA / 20 ... 4 mA 0 ... 10 V / 10 ... 0 V
connection types	cable 2 m connector M12	connector M12 cable 2 m	connector M8	cable 2 m connector M12
housing material	stainless steel	brass nickel plated	plastic	plastic / die-cast zincs
operating temperature	-10 ... +60 °C	-10 ... +60 °C	-10 ... +60 °C	-10 ... +60 °C
protection class	IP 67	IP 67	IP 67	IP 67
specific features	<ul style="list-style-type: none"> ■ optional sonic deflection bracket mounting 			

Learn more:
www.baumer.com/ultrasonic-distance

Ultrasonic sensors

Application-specific ultrasonic distance sensors – Chemically robust / for off-highway-machinery

- Chemical robust stainless steel sensors with patented parylene coating
- Ultrasonic distance sensors for off-highway-machinery - Designed for Reliability



	UNAR 12	UNAR 18	U750
category	Chemically robust stainless steel sensors with parylene coating		For off-highway-machinery
features	<ul style="list-style-type: none"> ■ Miniature sensor for narrow designs ■ Patented all-round protection ■ FDA-compliant materials ■ Very short response time 	<ul style="list-style-type: none"> ■ M18 standard housing ■ FDA-compliant materials ■ Internal and external Teach-in 	<ul style="list-style-type: none"> ■ Designed for reliability ■ Very small blind range ■ For fill level application ■ 5 VDC power supply
dimensions	M12 × 70 mm	M18 × 91,5 mm	70 × 48 × 115 mm
measuring distance	20 ... 200 mm	60 ... 1000 mm	100 ... 2300 mm
response time	< 30 ms	< 80 ms	< 3000 ms
resolution	< 0,3 mm	< 0,3 mm	< 1 mm
repeat accuracy	< 0,5 mm	< 0,5 mm	< 5 mm
output	0 ... 10 mA / 10 ... 0 mA 0 ... 10 V / 10 ... 0 V	4 ... 20 mA / 20 ... 4 mA 0 ... 10 V / 10 ... 0 V	0,5 ... 4,5 VDC
connection types	connector M12	connector M12	German connector DT13-4P 4 pin
housing material	stainless steel	stainless steel	plastic (PA 10T/X)
operating temperature	0 ... +60 °C	0 ... +60 °C	-20 ... +70 °C
protection class	IP 67	IP 67	IP 67

Application-specific ultrasonic distance sensors – Sonic nozzles / measuring distance

- Ultrasonic distance sensors with sonic nozzles
- Ultrasonic distance sensors with large sensing distance



Learn more:
www.baumer.com/ultrasonic-distance



	UNAM 12	UNCK 09 UNDK 09	UNAM 50	UNAM 70
category	sensors with sonic nozzles		long ranges	
features	<ul style="list-style-type: none"> ■ External Teach-in ■ M12 connector ■ Beam columnator for very narrow sonic cone profile 	<ul style="list-style-type: none"> ■ High resolution ■ Minimal blind region ■ RS 232 ■ Various mounting options ■ Flat housing ■ Narrow sonic beam angle for detection in openings of up to 3 mm 	<ul style="list-style-type: none"> ■ Large sensing range ■ Internal and external Teach-in ■ Cable and connector versions ■ Potentiometer versions 	<ul style="list-style-type: none"> ■ Large sensing range ■ Internal and external Teach-in ■ M12 connector
dimensions	M12	8,6 × 48,8 × 57,5 mm	M30	M30
measuring distance	20 ... 400 mm	23 ... 200 mm	400 ... 2500 mm	600 ... 6000 mm
resolution	< 0,3 mm	< 0,1 mm	< 0,3 mm	< 2 mm
repeat accuracy	< 0,5 mm	< 0,5 mm	< 1mm	< 1mm
output	0 ... 10 mA / 10 ... 0 mA 0 ... 10 V / 10 ... 0 V	0 ... 10 mA / 10 ... 0 mA RS 232	4 ... 20 mA / 20 ... 4 mA 0 ... 10 V / 10 ... 0 V	4 ... 20 mA / 20 ... 4 mA 0 ... 10 V / 10 ... 0 V
connection types	connector M12	connector M12 cable 2 m	connector M12 cable 2 m	connector M12
housing material	brass nickel plated	plastic	brass nickel plated	brass nickel plated
operating temperature	-10 ... +60 °C	0 ... +60 °C	-10 ... +60 °C	-25 ... +60 °C
protection class	IP 67	IP 67	IP 67	IP 67

Inductive distance sensors – AlphaProx®

Inductive distance sensors – cylindrical

- High resolution and repeatability
- Wide measuring ranges
- High measuring speed
- Extra-short designs



	IWRM 04	IR06.DxxS	IR08.DxxS	IR12.DxxS
category	subminiature	sub-/miniature	sub-/miniature	compact
features	<ul style="list-style-type: none"> ■ Very high resolution ■ Quick response time ■ Fully integrated electronics ■ With M5 connector 	<ul style="list-style-type: none"> ■ Large measuring distance ■ Very high resolution ■ Quick response time ■ Fully integrated electronics ■ Short design 	<ul style="list-style-type: none"> ■ Large measuring distance ■ Very high resolution ■ Quick response time ■ Fully integrated electronics ■ Short design 	<ul style="list-style-type: none"> ■ Large measuring distance ■ Very high resolution ■ Quick response time ■ Linearized output calibration curves with Teach-in
dimensions	ø 4 mm	ø 6,5 mm	M8	M12
housing length	30 mm	up 22 mm	up 22 mm	up 40 mm
measuring distance Sd	0 ... 1 mm	0 ... 3 mm	0 ... 3 mm	0 ... 6 mm
resolution	1 µm	1 µm	1 µm	1 µm
repeat accuracy	5 µm	10 µm	10 µm	10 µm
response time	0,5 ms	0,5 ms	0,5 ms	1 ms
output signal	0 ... 10 V	0 ... 10 mA 0 ... 10 V	0 ... 10 mA 0 ... 10 V	4 ... 20 mA 0 ... 10 V
connection types	connector M5	cable 2 m connector M8	cable 2 m connector M8	cable 2 m connector M12
housing material	stainless steel	stainless steel	stainless steel	brass nickel plated
operating temperature	+10 ... +60 °C	-10 ... +70 °C	-10 ... +70 °C	-25 ... +75 °C
protection class	IP 67	IP 67	IP 67	IP 67

Learn more:
www.baumer.com/inductive-distance



IR18.DxxS

IR30.DxxS

compact

compact

- | | |
|--|---|
| <ul style="list-style-type: none"> ■ Large measuring distance ■ Very high resolution ■ Linearized output calibration curves with Teach-in | <ul style="list-style-type: none"> ■ Large measuring distance ■ Very high resolution ■ Linearized output calibration curves with Teach-in ■ Flush and non-flush designs |
|--|---|

M18

M30

up 50 mm

60 mm

0 ... 8 mm

0 ... 24 mm

2 µm

5 µm

15 µm

20 µm

2 ms

2 ms

4 ... 20 mA
0 ... 10 V

4 ... 20 mA
0 ... 10 V

cable 2 m
connector M12

connector M12

brass nickel plated

brass nickel plated

-10 ... +70 °C

-25 ... +75 °C

IP 67

IP 67

Inductive distance sensors – AlphaProx®

Inductive distance sensors – rectangular

- High repeat accuracy
- Large measuring range
- High measuring speed



	IWFM 05	IF08.D02S	IWFM 12	IWFM 18
category	subminiature	subminiature	compact	compact
features	<ul style="list-style-type: none"> ■ Very high resolution ■ Quick response time ■ Fully integrated electronics ■ With M5 connector 	<ul style="list-style-type: none"> ■ Very high resolution ■ Compact model ■ Fully integrated electronics ■ Through-hole for M3 bolt 	<ul style="list-style-type: none"> ■ Integrated current and voltage output ■ Fully integrated electronics 	<ul style="list-style-type: none"> ■ Integrated current and voltage output ■ Fully integrated electronics
dimensions (B × T × L)	5 × 5 × 32 mm	8 × 4,7 × 16 mm	12 × 12 × 60 mm	18 × 10 × 30 mm
measuring distance Sd	0 ... 1 mm	0 ... 2 mm	0 ... 4 mm	0 ... 4 mm
resolution	1 µm	1 µm	1 µm	1 µm
repeat accuracy	10 µm	20 µm	5 µm	5 µm
response time	0,5 ms	1 ms	2 ms	2 ms
output signal	0 ... 10 V	0 ... 10 V	0 ... 10 V 4 ... 20 mA	0 ... 10 V 4 ... 20 mA
connection types	connector M5	cable 2 m flylead connector M8 flylead connector M5	cable 2 m connector M8	connector M8
housing material	brass nickel plated	die-cast zinc nickel plated	brass nickel plated	brass nickel plated
operating temperature	+10 ... +60 °C	+10 ... +60 °C	-10 ... +70 °C	-10 ... +70 °C
protection class	IP 67	IP 67	IP 67	IP 67
specific features	<ul style="list-style-type: none"> ■ smallest inductive sensor with analog output 	<ul style="list-style-type: none"> ■ extremely low-profile version for front-side single-hole installation 		

Learn more:
www.baumer.com/inductive-distance



IWFM 20

compact

- Integrated current and voltage output
- Fully integrated electronics

20 × 12 × 35 mm

2 ... 5 mm

1 μm

10 μm

2 ms

0 ... 10 V
1 ... 9 V
4 ... 20 mA

connector M8
flylead connector M8

brass nickel plated

-10 ... +70 °C
0 ... +60 °C

IP 67

Inductive distance sensors – *AlphaProx*[®]

Linearized characteristic curve

- Measuring range configurable by teach-in
- Negligible production lot variations
- Internal temperature compensation
- Easy integration into the controller
- Variants with an additional digital output



linearized characteristic curve	IR06.DxxL	IR08.DxxL	IR12.DxxL	IR18.DxxL	IR30.DxxL
category	miniatur	miniatur	compact	compact	compact
features	<ul style="list-style-type: none"> ■ Adjustable measuring range ■ Linearized output calibration curves ■ External Teach-in 	<ul style="list-style-type: none"> ■ Adjustable measuring range ■ Linearized output calibration curves ■ External Teach-in 	<ul style="list-style-type: none"> ■ Adjustable measuring range ■ Linearized output calibration curves ■ External Teach-in 	<ul style="list-style-type: none"> ■ Adjustable measuring range ■ Linearized output calibration curves ■ External Teach-in 	<ul style="list-style-type: none"> ■ Adjustable measuring range ■ Linearized output calibration curves ■ External Teach-in
dimensions	ø 6,5 mm	M8	M12	M18	M30
housing length	up 40 mm	up 40 mm	60 mm	60 mm	60 mm
measuring distance S _d	0 ... 3 mm	0 ... 3 mm	0 ... 6 mm	0 ... 8 mm	0 ... 24 mm
resolution	3 µm	3 µm	3 µm	8 µm	5 µm
repeat accuracy	10 µm	10 µm	10 µm	15 µm	20 µm
response time	2 ms	2 ms	1 ms	1 ms	5 ms
output signal	0 ... 10 V	0 ... 10 V	4 ... 20 mA 0 ... 10 V	4 ... 20 mA 0 ... 10 V	4 ... 20 mA 0 ... 10 V
connection types	cable 2 m connector M8	cable 2 m connector M8	connector M12	connector M12	connector M12
housing material	stainless steel	stainless steel	brass nickel plated	brass nickel plated	brass nickel plated
operating temperature	-25 ... +75 °C	-25 ... +75 °C	-25 ... +75 °C	-25 ... +75 °C	-25 ... +75 °C
protection class	IP 67	IP 67	IP 67	IP 67	IP 67

Inductive sensors with reduction factor 1

- Two to four times larger measuring range for aluminum
- Adjustable measuring range limits (teach)
- Particularly suitable for measurements on non-ferromagnetic metals
- Great flexibility in construction and installation



Learn more:
www.baumer.com/inductive-distance



IWFM 18

IWFK 20

compact

compact

- Integrated current and voltage output
- Fully integrated electronics

- Adjustable measuring range
- Teach-in button housing-integrated
- Large measuring range
- Plastic housing

18 × 10 × 30 mm

20 × 15 × 42 mm

0 ... 4 mm

0 ... 10 mm

5 µm

10 µm

10 µm

15 µm

2,5 ms

3 ms

0 ... 10 V

0 ... 10 VDC

connector M8

connector M8

brass nickel plated

plastic

-10 ... +70 °C

-10 ... +70 °C

IP 67

IP 67



factor 1

IR18.DxxF

category

compact

features

- Very high measurement sensitivity
- Linearized output calibration curves
- External Teach-in

dimensions

M18

housing length

60 mm

measuring distance Sd

0 ... 8 mm

resolution

20 µm

repeat accuracy

30 µm

response time

15 ms

output signal

0 ... 10 V

connection types

connector M12

housing material

brass nickel plated

operating temperature

-25 ... +75 °C

protection class

IP 67

Inductive distance sensors – *AlphaProx*[®]

High-precision sensors

High-precision and high-sensitivity inductive sensors

- Large signal change for even the smallest position changes
- Solutions for high-end applications with a resolution of up to 4 nm
- Completely integrated in compact housing
- Easy teach option



high-precision and high-sensitivity inductive sensors	IPRM 12	IR12.DxxK IR18.DxxK
category	High-precision sensors	High-sensitivity sensors
dimensions	M12	M12 M18
housing length	90 mm	60 mm
measuring distance S_d	0 ... 3 mm	0,25 mm (Teach-in between 0 ... 3 mm)
resolution	0,004 μm	0,25 μm
sensitivity		40 V/mm 64 mA/mm
repeat accuracy	1 μm	1 μm
response time	2 ms	3 ms
output signal	4 ... 20 mA	4 ... 20 mA 0 ... 10 V
connection types	connector M12	cable 2 m connector M12
housing material	steel nickel plated	steel nickel plated
operating temperature	0 ... +60 °C	-10 ... +60 °C
protection class	IP 67	IP 67

Sturdy sensors

Rugged stainless steel housing

- Designed for Reliability
- Inductive distance sensors for Off-Highway-machines
- Sensors for potentially explosive areas



Learn more:
www.baumer.com/inductive-distance



sturdy sensors	IWRM 18	IWRR 18
category	Outdoor design	Outdoor design Washdown design
dimensions	M18	M18
housing length	60 mm	60 mm
measuring distance Sd	0 ... 8 mm	0 ... 7 mm
resolution	5 µm	5 µm
repeat accuracy	15 µm	15 µm
response time	2 ms	2 ms
output signal	4 ... 20 mA	4 ... 20 mA
connection types	connector M12	connector M12
housing material	brass nickel plated	stainless steel 1.4404 (V4A)
operating temperature	-40 ... +70 °C	-40 ... +70 °C
protection class	IP 67	IP 68/69K & <i>proTect+</i>
specific features		Ecolab-tested FDA-compliant

Designed for Reliability	IR18V.D08L
category	For Off-Highway-machines
dimensions	M18
housing length	50 mm
measuring distance Sd	0 ... 8 mm
resolution	8 µm
repeat accuracy	16 µm
switching frequency	< 450 Hz
output signal	0,5 ... 4,5 VDC
connection types	cabel flylead connector German
housing material	brass nickel plated
operating temperature	-40 ... +85 °C
protection class	IP 69K (face) IP 68
approvals	EN 13309-2010 EN ISO 14982-2009 ISO 13766-2009

Inductive distance sensors – AlphaProx®

Inductiv sensors with IO-Link interface

- Distance and frequency measurement
- Counter function
- Measured value filtering for fast or accurate applications
- Configurable digital output
- Comprehensive diagnostic data



IO-Link

IR06.DxxL



IO-Link

IR08.DxxL



IO-Link

IR12.DxxL



IO-Link

IR18.DxxL



IO-Link

IR30.DxxL

linearized characteristic curve

category	miniatur	miniatur	compact	compact	compact
features	<ul style="list-style-type: none"> ■ Adjustable measuring range ■ Linearized output calibration curves 	<ul style="list-style-type: none"> ■ Adjustable measuring range ■ Linearized output calibration curves 	<ul style="list-style-type: none"> ■ Adjustable measuring range ■ Linearized output calibration curves 	<ul style="list-style-type: none"> ■ Adjustable measuring range ■ Linearized output calibration curves 	<ul style="list-style-type: none"> ■ Adjustable measuring range ■ Linearized output calibration curves
dimensions	ø 6,5 mm	M8	M12	M18	M30
housing length	46 mm	46 mm	50 mm	60 mm	60 mm
measuring distance Sd	0 ... 3 mm	0 ... 3 mm	0 ... 6 mm	0 ... 10 mm	0 ... 18 mm
resolution	5 µm	5 µm	3 µm	5 µm	10 µm
repeat accuracy	10 µm	10 µm	10 µm	15 µm	20 µm
min. cycle time	0,6 ms	0,6 ms	1 ms	1 ms	5 ms
output signal	Push-Pull / IO-Link				
adjustable parameters	Switching points or switching window for distance, frequency or counter, measuring range, output logic, switching hysteresis, input / output logic, switch-off delay, output circuit, measured value filter, SSC / output assignment, LED behaviour, teaching options				
process data	MDC: Distance, frequency or counter SSC1: Distance SSC2: Distance SSC3: Frequency SSC4: Counter				
diagnostic data	Switching cycles and operating time, boot cycles over service life, histograms of process data values and the operating voltage and device temperature				
connection types	connector M8	connector M8	connector M12	connector M12	connector M12
housing material	stainless steel	stainless steel	brass nickel plated	brass nickel plated	brass nickel plated
operating temperature	-25 ... +75 °C	-25 ... +75 °C	-25 ... +75 °C	-25 ... +75 °C	-25 ... +75 °C
protection class	IP 67	IP 67	IP 67	IP 67	IP 67

Learn more:
www.baumer.com/inductive-distance

Linear bearingless encoders

Size 10 mm. Unlimited measuring range.

- Non-contact, wearfree magnetic sensing technology
- Impervious to soiling and resistant against vibration
- Extended life span thanks to robustness and durability in extreme conditions
- Maximized machine and system uptime



MIL10

category	Linear bearingless encoder
features	<ul style="list-style-type: none">■ Linear measuring system■ Output signals A 90° B with index pulse■ Output circuit push-pull or RS422
size (sensing head)	rectangular
dimensions (sensing head)	10 x 15 x 45,5 mm
sensing distance	0,1 ... 0,6 mm
interpolation	factor 20, 50, 100
movement speed	<5 m/s (resolution 5 µm) <10 m/s (resolution 10 µm) <25 m/s (resolution 25 µm)
output circuit	HTL/Push-pull TTL/RS422
output signal	A 90° B, R + inverted
total resolution	5 µm (factor 4 evaluation) 10 µm (factor 4 evaluation) 25 µm (factor 4 evaluation)
system-accuracy	±(0,02 mm +0,04 mm x magnetic belt length)
connection	cable 2 m cable 0,3 m with connector M12
voltage supply	10 ... 30 VDC, 5 VDC ±5 %
operating temperature	-40 ... +85 °C
protection class	IP 66, IP 67

Learn more:
www.baumer.com/linear-encoders

Measuring wheel encoders

The efficient and reliable solution to length measurement

- Programmable incremental encoders used in conjunction with measuring wheels
- Particularly easy acquisition of position and speed with high flexibility
- Perfect for ink jet and laser printing applications thanks to precise optical sensing



MA20



MR series

category

Compact, high-resolution measuring wheel system

features

- Measuring wheel encoder comprising encoder, tether arm and measuring wheel
- Contact pressure fully adjustable

configurable parameters

16 pre-defined resolutions

configuration

HEX switch

sensing method

optical

dimensions (housing)

∅ 40 mm (encoder)

voltage supply

4,75 ... 30 VDC

output stage

HTL/push-pull

output signals

A 90° B

shaft type

solid shaft ∅ 6 mm

connection types

flange connector M12, cable radial

pulses per revolution

100 ... 25 000

operating temperature

-20 ... +85 °C

protection class

IP 64

operating speed

≤ 3000 rpm

options

measuring wheels available with different rubber surface

category

Measuring wheels

features

- The perfect grip at any surface
- Different surface profiles to match the application best
- Circumference 200, 300 or 500 mm
- For shaft diameter 4 ... 12 mm

Maximum flexibility through versatile configuration options.



Learn more:
www.baumer.com/measuring-wheel



EIL580P-SC

category	Incremental encoders – programmable resolution and signals
features	<ul style="list-style-type: none"> ■ Solid shaft with clamping flange max. \varnothing10 mm or synchro flange max. \varnothing6 mm
configurable parameters	Pulses per revolution, output stage HTL or TTL, zero pulse, signal sequence
configuration	Programming software, programming tool
sensing method	optical
dimensions (housing)	\varnothing 58 mm
voltage supply	4,75 ... 30 VDC
output stage	TTL/RS422 HTL/push-pull
output signals	A 90° B, R + inverted
shaft type	solid shaft \varnothing 10 mm
connection types	flange connector M23, radial / axial cable, radial / axial / tangential
pulses per revolution	1 ... 65536
operating temperature	-40 ... +100 °C
protection class	IP 65, IP 67
operating speed	\leq 12 000 rpm (IP 65) \leq 6000 rpm (IP 67)
max. shaft load	\leq 40 N axial, \leq 80 N radial
options	isolated hollow shaft, flange variant, connector variant



Z-PA-EI-H

category	Handheld programming tool
features	<ul style="list-style-type: none"> ■ Simple and quick configuration ■ 4 user-assignable buttons ■ Intuitive menu navigation ■ Standard AA battery supply

Cable transducers

Linear travel measurement up to 50 meters.

- High linearity throughout the entire measuring range
- Measuring length up to 50 m
- High quality and extremely durable designs
- OEM and retrofit



	GCA5	GCA8	GCA12
features	<ul style="list-style-type: none"> ■ Measuring length up to 7.8 m ■ Non-contact magnetic sensing ■ Dirt skimmer ■ Three-chamber structure 	<ul style="list-style-type: none"> ■ Measuring length up to 12 m ■ Absolute potentiometer sensing ■ Dirt skimmer ■ Three-chamber structure 	<ul style="list-style-type: none"> ■ Measuring length up to 12 m ■ Absolute potentiometer sensing ■ Dirt skimmer ■ Three-chamber structure
interface			
- SSI	–	–	–
- Analog / redundant	■ / ■	■ / ■	■ / ■
- CANopen® / redundant	■ / ■	■ / ■	■ / ■
sensing method	non-contact magnetic	potentiometric	potentiometric
dimension	88 × 88 × 65 mm	88 × 88 × 80,5 mm	126 × 126 × 98 mm
voltage supply	8 ... 30 VDC 12 ... 30 VDC (Analog) 10 ... 30 VDC (CANopen®)		
connection			
- flange connector M12	radial		
- cable	radial		
measuring length	7800 mm	8000 mm	12 000 mm
resolution			
- Analog	up to 14 bit		
linearity	±0,5 %	±0,3 %	±0,3 %
operating temperature	–40 ... +85 °C		
protection class	IP 67	IP 65	IP 65
materials	housing: plastic cable: stainless steel with coating	housing: plastic/aluminum cable: stainless steel with coating	housing: plastic/aluminum cable: stainless steel with coating



Learn more:
www.baumer.com/cabletransducer



	GCI2	GCA2	GCI4	GCA4	GCI15	GCA15	GCI50	GCA50
features	<ul style="list-style-type: none"> Measuring length 2.1 m Absolute or incremental encoder 	<ul style="list-style-type: none"> Measuring length 3 m Absolute or incremental encoder 	<ul style="list-style-type: none"> Measuring length 5...15 m Absolute or incremental encoder 	<ul style="list-style-type: none"> Measuring length 30...50 m Absolute or incremental encoder 				
interface								
- SSI	–	■	–	■	–	■	–	■
- BiSS-C	–	■	–	■	–	■	–	■
- CANopen® / SAE J1939	–	■ / ■	–	■ / ■	–	■ / ■	–	■ / ■
- DeviceNet	–	■	–	■	–	■	–	■
- Profibus-DP	–	■	–	■	–	■	–	■
- EtherCAT	–	■	–	■	–	■	–	■
- EtherNet/IP	–	■	–	■	–	■	–	■
- Powerlink	–	■	–	■	–	■	–	■
- Profinet	–	■	–	■	–	■	–	■
function principle	incremental	absolute	incremental	absolute	incremental	absolute	incremental	absolute
sensing method	optical							
dimension	60 × 60 mm		96 × 96 × 56 mm		115 × 115 × 82,5 - 180,5 mm		200 × 200 × 268 - 333,5 mm	
voltage supply	5 VDC 4,75 ... 30 VDC	10 ... 30 VDC	5 VDC 4,75 ... 30 VDC	10 ... 30 VDC	5 VDC 4,75 ... 30 VDC	10 ... 30 VDC	5 VDC 4,75 ... 30 VDC	10 ... 30 VDC
output stage								
- TTL/RS422	■	–	■	–	■	–	■	–
- HTL/push-pull	■	–	■	–	■	–	■	–
connection								
- flange connector M12, M23	radial, axial							
- cable	radial, axial							
- bus cover	radial							
measuring length	2100 mm		3000 mm		5000 ... 15 000 mm		30 000 ... 50 000 mm	
linearity	±0,01 %							
operating temperature	–20 ... +85 °C							
protection (encoder)	IP 65							
materials	cable-pull housing: plastic encoder: aluminium cable: stainless steel with coating		cable-pull housing: aluminum encoder: aluminium cable: stainless steel with coating					
options	operating temperature -40 ... +85 °C							



Cables & adapters

Cable socket unassembled

- M8 and M12
- Straight or angled
- 3-, 4- and 5-pole versions

Cable socket

- M5, M8, M9, M12 or 8 mm snap-in
- 3- or 12-pole versions
- Straight or angled
- Screened or unshielded
- Various sheath materials
- Various lengths available up to 25 m


Male connector

- M8
- 3-pole versions
- Straight
- PUR sheath
- Various lengths available up to 3 m

Connecting cables

- M8 or M12
- 3- or 4-pole versions
- Straight or angled
- PUR sheath
- Various lengths available up to 10 m

characteristics



Mounting accessories

Mounting kits

- Sensofix Mounting sets
- Robust metal version
- Mounting sets for various sensor types
- Easy, flexible alignment

Mounting bracket

- Matching mounting brackets available for various sensor types
- High quality metal
- Compatible with flexible Sensofix

Mounting bracket

- Easy, fast mounting of smooth and cylindrical sensors
- Available from \varnothing 6,5 mm to \varnothing 20 mm

Bracket for profiles

- Mounting adapter for diverse sensor types
- e.g. for mounting in profiles, slots, cylinders, etc.

characteristics



Learn more:
www.baumer.com/accessories



 IO-Link

Testing and parameterization	Sensor test equipment	Teach-in Adapter	USB-IO-Link Master
characteristics	<ul style="list-style-type: none"> ■ Display (V or mA) or. LED (PNP/ NPN) reading ■ Sensor programming using integrated teach key ■ Connection option for plug-in power supply (available as accessory) 	<ul style="list-style-type: none"> ■ Sensor programming with teach-in pin ■ Teach-in using key ■ For sensors with M12 connection 	<ul style="list-style-type: none"> ■ Teach-in, parameterization and operation of IO-Link capable sensors



Network components	AS-i
characteristics	<ul style="list-style-type: none"> ■ Input/output modules ■ Models for control cabinet installation ■ Extra-compact miniature modules ■ Various numbers of inputs and outputs ■ S-slave or A/B slave types ■ Various AS interface accessories such as cables, masters or branches



Reflectors Lenses Apertures Glass	Reflectors	Reflective tapes	Apertures	Glass covers Filter Lens
--	------------	------------------	-----------	--------------------------------

characteristics	<ul style="list-style-type: none"> ■ Self-adhesive or screw-mount reflectors ■ Circular or rectangular ■ All-metal reflectors ■ Ecolab certified types, resistant to cleaning agents 	<ul style="list-style-type: none"> ■ Self-adhesive tapes ■ Various widths and lengths 	<ul style="list-style-type: none"> ■ Apertures for various sensor types 	<ul style="list-style-type: none"> ■ For various sensor types
-----------------	--	---	--	--



Beam columnators and deflector (Ultrasonic)	Beam columnators	Beam deflectors
---	------------------	-----------------

characteristics	<ul style="list-style-type: none"> ■ Replacement nozzles for sensors with sonic nozzles 	<ul style="list-style-type: none"> ■ Ideal for cramped spaces ■ Bends the sound 90°
-----------------	--	---



Learn more:
www.baumer.com/accessories



Magnets	Cylindrical magnets	Rectangular magnets and rotors
characteristics	<ul style="list-style-type: none"> ■ For all magnetic proximity switches ■ Magnets in various sizes and strengths ■ Magnetization along the cylinder axis ■ For ambient temperatures up to +180 °C 	<ul style="list-style-type: none"> ■ For magnetic rotary encoders ■ Magnets available individually or integrated in the rotor ■ Magnetization throughout the depth ■ For ambient temperatures up to +180 °C

Baumer – the strong partner.

We at Baumer are close to our customers, understand their needs and provide the best solution. Worldwide customer service for Baumer starts with on-the-spot personal discussions and qualified consultation. Our application engineers speak your language and strive from the start, through an interactive problem analysis, to offer comprehensive and user-compatible solutions.

We are close to you across the globe.

The worldwide Baumer sales organizations guarantee short delivery times and readiness to supply. Many of our customers are directly linked via our electronic order system with the JIT logistics process.

A worldwide network coupled with the most modern communication techniques enable us to deliver information quickly and transparently to decision makers in all Baumer locations.

Closeness to the customer for Baumer means being available for your needs anywhere and at any time.



Worldwide presence.



Africa

Algeria
Cameroon
Côte d'Ivoire
Egypt
Morocco
Reunion
South Africa

America

Brazil
Canada
Colombia
Mexico
United States
Venezuela

Asia

Bahrain
China
India
Indonesia
Israel
Japan
Kuwait
Malaysia
Oman
Philippines
Qatar
Saudi Arabia
Singapore
South Korea
Taiwan
Thailand
UAE

Europe

Austria
Belgium
Bulgaria
Croatia
Czech Republic
Denmark
Finland
France
Germany
Greece
Hungary
Italy
Malta
Martinique
Netherlands
Norway
Poland
Portugal
Romania
Russia
Serbia
Slovakia
Slovenia
Spain
Sweden
Switzerland
Turkey
United Kingdom

Oceania

Australia
New Zealand



For more information
about our worldwide
locations go to:
www.baumer.com/worldwide



Baumer

Passion for Sensors

Baumer Group

International Sales

P.O. Box · Hummelstrasse 17 · CH-8501 Frauenfeld

Phone +41 (0)52 728 1122 · Fax +41 (0)52 728 1144

sales@baumer.com · www.baumer.com

Represented by: