

CC800 TYPE 12 COMPACT CABINET COOLER AIR-TO-AIR DROP-IN MODEL

Rating @ 20°C Δ T Amps


Model Weight CC800 16 lbs

BTU / hr 3,800 Current Draw at 115 volts AC 0.6

Fan [<u>Size</u> 2 x 6"


Dimensions-Inches (H x W x D) 15 x 7-3/4 x 7

Efficiency: 55.2 Watts / °C ΔT based on average internal cabinet temperature.

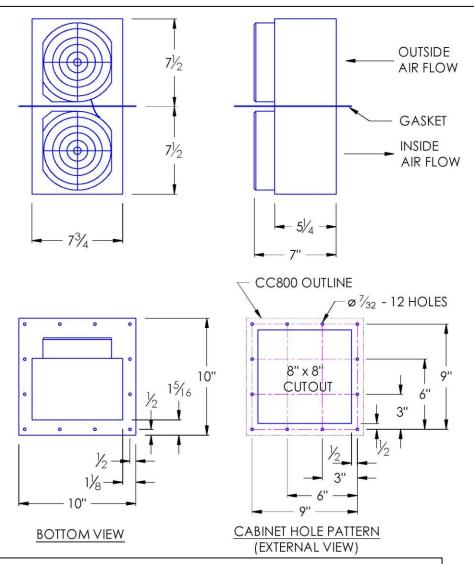



- 1. UL Listed for TYPE 12 environments.
- 2. CC800 Rated cooling: 1,100 Watts at 20°C ΔT (55.2 W/°C, mounted to an uninsulated 72" X 36" X 24" Cabinet)
- 3. Extends 7-1/2" into cabinet.
- 4. Housing is aluminum (color is black). Stainless steel is available.
- 5. Equipped with mounting gasket to maintain air tight seal.
- 6. Internal 6-ft. power cord with 3-prong plug is standard for AC powered units.
- 7. Available with VAC (115 & 230) and VDC (12, 24, & 48) fans. DC powered units include junction box, consult website.
- 8. Unit may be mounted vertically (as shown) or horizontally.
- 9. Optional: inlet air-filter kit available upon request.
- 10. For design, quote, and sizing assistance: call (866) 936-6736.

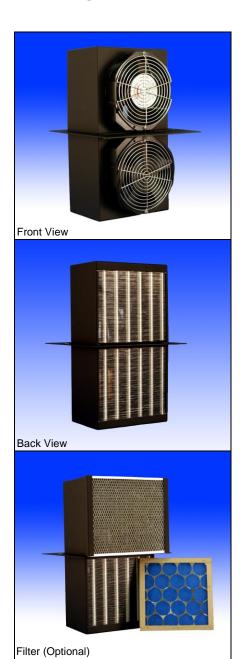







UL File #SA9567

Proudly made in USA

1010 O'Brien Drive Menlo Park, CA 94025 650.322.9500 norenproducts.com

CC800 TYPE 12

CCS-PBD-7.2.2-883353-B